


AUTHORITY	DESCRIPTION	DATE
N/A	Incorporation of IRN-870B-001 thru IRN-870B-003	25-APR-2018

DISTRIBUTION STATEMENT A: Approved For Public Release; Distribution is Unlimited

APPROVALS

Authored By: Philip Kwan

Checked By: Amit Patel

AUTHORIZED SIGNATURES	REPRESENTING	DATE
	GPS Directorate Space & Missile Systems Center (SMC) - LAAFB	22 MAY 18
	HQ Air Force Space Command (AFSPC/50 OG)	
	Department of Homeland Security (DHS), United States Coast Guard (USCG), Navigation Center (NAVCEN)	
	Department of Transportation (DOT), Federal Aviation Administration (FAA)	

INTERFACE CONTROL DOCUMENT

UNLESS OTHERWISE SPECIFIED: NUMBERS ARE REPRESENTED IN DECIMAL FORM.

Interface Control Contractor:
Engility (GPS SE&I)
200 N. Sepulveda Blvd., Suite 1800
El Segundo, CA 90245

ICD TITLE:

NAVSTAR Next Generation GPS Operational Control Segment (OCX) to User Support Community Interface

THIS DOCUMENT SPECIFIES TECHNICAL REQUIREMENTS AND NOTHING HEREIN CONTAINED SHALL BE DEEMED TO ALTER THE TERMS OF ANY CONTRACT OR PURCHASE ORDER BETWEEN ALL PARTIES AFFECTED

SIZE A	CODE IDENT 66RP1	ICD NO. ICD-GPS-870
SCALE: N/A	REV: C	

AUTHORITY	DESCRIPTION	DATE
N/A	Incorporation of IRN-ICD-870B-001 thru IRN-ICD-870B-003	25-APR-2018
<p>DISTRIBUTION STATEMENT A: Approved For Public Release; Distribution is Unlimited</p>		
APPROVALS		
Authored By: Philip Kwan		Checked By: Amit Patel
AUTHORIZED SIGNATURES	REPRESENTING	DATE
	GPS Directorate Space & Missile Systems Center (SMC) - LAAFB	
<i>Adam Edwards</i>	HQ Air Force Space Command (AFSPC/50 OG)	23 May 2018
N/A	Raytheon Company	
	Department of Homeland Security (DHS), United States Coast Guard (USCG) Navigation Center (NAVCEN)	
	Department of Transportation (DOT) Federal Aviation Administration (FAA)	
INTERFACE CONTROL DOCUMENT		
UNLESS OTHERWISE SPECIFIED: NUMBERS ARE REPRESENTED IN DECIMAL FORM.	Interface Control Contractor: Engility (GPS SE&I) 200 N. Sepulveda Blvd., Suite 1800 El Segundo, CA 90245	
	ICD TITLE: NAVSTAR Next Generation GPS Operational Control Segment (OCX) to User Support Community Interface	
THIS DOCUMENT SPECIFIES TECHNICAL REQUIREMENTS AND NOTHING HEREIN CONTAINED SHALL BE DEEMED TO ALTER THE TERMS OF ANY CONTRACT OR PURCHASE ORDER BETWEEN ALL PARTIES AFFECTED	SIZE A	CODE IDENT 66RP1
	SCALE: N/A	REV: C

AUTHORITY	DESCRIPTION	DATE
N/A	Incorporation of IRN-ICD-870B-001 thru IRN-ICD-870B-003	25-APR-2018
<p>DISTRIBUTION STATEMENT A: Approved For Public Release; Distribution is Unlimited</p>		
APPROVALS		
Authored By: Philip Kwan		Checked By: Amit Patel
AUTHORIZED SIGNATURES	REPRESENTING	DATE
	GPS Directorate Space & Missile Systems Center (SMC) - LAAFB	
	HQ Air Force Space Command (AFSPC/50 OG)	
N/A	Raytheon Company	
HOLMES.RUSSEL L.E.1040418080 <small>Digitally signed by HOLMES.RUSSELLE.1040418080 Date: 2018.06.05 13:24:04 -04'00'</small>	Department of Homeland Security (DHS), United States Coast Guard (USCG) Navigation Center (NAVCEN)	05 June 2018
	Department of Transportation (DOT) Federal Aviation Administration (FAA)	
INTERFACE CONTROL DOCUMENT		
UNLESS OTHERWISE SPECIFIED: NUMBERS ARE REPRESENTED IN DECIMAL FORM.	Interface Control Contractor: Engility (GPS SE&I) 200 N. Sepulveda Blvd., Suite 1800 El Segundo, CA 90245	
	ICD TITLE: NAVSTAR Next Generation GPS Operational Control Segment (OCX) to User Support Community Interface	
THIS DOCUMENT SPECIFIES TECHNICAL REQUIREMENTS AND NOTHING HEREIN CONTAINED SHALL BE DEEMED TO ALTER THE TERMS OF ANY CONTRACT OR PURCHASE ORDER BETWEEN ALL PARTIES AFFECTED	SIZE A	CODE IDENT 66RP1
	SCALE: N/A	REV: C

AUTHORITY	DESCRIPTION	DATE
N/A	Incorporation of IRN-ICD-870B-001 thru IRN-ICD-870B-003	25-APR-2018
<p>DISTRIBUTION STATEMENT A: Approved For Public Release; Distribution is Unlimited</p>		
APPROVALS		
Authored By: Philip Kwan		Checked By: Amit Patel
AUTHORIZED SIGNATURES	REPRESENTING	DATE
	GPS Directorate Space & Missile Systems Center (SMC) - LAAFB	
	HQ Air Force Space Command (AFSPC/50 OG)	
N/A	Raytheon Company	
	Department of Homeland Security (DHS), United States Coast Guard (USCG) Navigation Center (NAVCEN)	
<i>Ha Nguyen</i>	Department of Transportation (DOT) Federal Aviation Administration (FAA)	29 May 2018
INTERFACE CONTROL DOCUMENT		
UNLESS OTHERWISE SPECIFIED: NUMBERS ARE REPRESENTED IN DECIMAL FORM.	Interface Control Contractor: Engility (GPS SE&I) 200 N. Sepulveda Blvd., Suite 1800 El Segundo, CA 90245	
	ICD TITLE: NAVSTAR Next Generation GPS Operational Control Segment (OCX) to User Support Community Interface	
THIS DOCUMENT SPECIFIES TECHNICAL REQUIREMENTS AND NOTHING HEREIN CONTAINED SHALL BE DEEMED TO ALTER THE TERMS OF ANY CONTRACT OR PURCHASE ORDER BETWEEN ALL PARTIES AFFECTED	SIZE A	CODE IDENT 66RP1
	SCALE: N/A	REV: C

REVISION RECORD			
LTR	DESCRIPTION	DATE	APPROVED
NC	Initial Release	13 Aug 2010	13 Aug 2010
A	Update data formats for OCX (RFC 41), including adding the A-S Status and ESHS files. Add IA requirements (data integrity) for this interface (RFC 45)	15 Jun 2011	1 Nov 2011
B	IRN-ICD-870A-001 – Incorporates Verification Cross Reference Matrix (VCRM)	27 Sep 2012	15 Feb 2013
	IRN-ICD-870A-002 – RFC 156 – Define Scope of Non-Repudiation Requirements		13 Dec 2012
	IRN-ICD-870A-003 – Addition of For Official Use Only Appendix.	22 Jan 2013	17 Apr 2013
	IRN-ICD-870A-004 – IRN 870A-003 content removed and ICD updated to reflect OCX baseline for generation and dissemination of public release GPS data products.	24 Sep 2013	10 Oct 2013
C	IRN-ICD-870B-001 – RFC 308 – Update ICD-GPS-870 and ICD-GPS-240 to align with new OCX to external agency interfaces	21 Sep 2016	13 Mar 2017
	IRN-ICD-870B-002 – RFC 352 – Update ICD-GPS-240 and ICD-GPS-870 for NANU Issuance	6 Sep 2017	8 Jan 2018
	IRN-ICD-870B-003 – RFC 351 – Message Updates to ICD-GPS-240 and ICD-GPS-870		
	Up Rev Release	25 Apr 2018	22 May 2018

TABLE OF CONTENTS

1 SCOPE.....	1
1.1 Scope.....	1
1.2 Key Events and Transition Plans	2
1.3 Interface Control Document Approval and Changes.....	3
2 APPLICABLE DOCUMENTS	4
2.1 Government Documents	4
2.2 Non-Government Documents	6
3 REQUIREMENTS.....	7
3.1 Interface Identification.....	7
3.1.2 GPS Control Segment.....	14
3.1.3 GPS User and User-support communities	15
3.2 Interface Definitions	15
3.2.1 Generation of Public Common Almanac Product	15
3.2.2 Generation of Ops Status Product.....	15
3.2.3 Generation of GPS Advisory Product.....	16
3.2.4 Legacy Anti-Spoofing (A-S) Status.....	16
3.2.5 Data Distribution.....	16
3.3 GPS MCS to GPS User Support Community Data Integrity.....	17
3.3.1 Digital Signatures.....	19
4 QUALITY ASSURANCE.....	20
5 PREPARATION FOR DELIVERY	22
6 NOTES.....	23
6.1 Acronyms and Abbreviations	23
7 APPROVAL	26
10 APPENDIX 1: NANU DATA FORMATS	27
10.1 Notice Advisory to Navstar Users	27
10.1.1 Scheduled Outages.....	27
10.1.2 Unscheduled Outages.....	32
10.1.3 General NANU Messages.....	34
10.1.4 Other Messages.....	35
10.2 NANU Notification Times.....	38
10.3 NANU Message Format	38
10.3.1 NANU Header	39
10.3.2 NANU Section 1	39
10.3.2.1 NANU Message Description	40
10.3.2.2 NANU Reference Information.....	40
10.3.2.3 Satellite Identification.....	41

10.3.2.4 Outage Time.....	41
10.3.3 NANU Section 2	42
10.3.4 NANU Section 3	42
20 APPENDIX 2: OPERATIONAL ADVISORY DATA FILE	43
20.1 Operational Advisory	43
20.2 OA Header.	43
20.3 OA Section 1	44
20.4 OA Section 2.....	44
20.5 OA Section 3.....	45
30 APPENDIX 3: SATELLITE OUTAGE FILE (SOF) FORMAT	46
40 APPENDIX 4: ALMANAC DATA FILES.....	53
40.1 Almanac Description	53
40.2 SEM Almanac Parameters Definition.....	53
40.3 SV Health Word.....	53
40.4 SEM Almanac Format	55
40.5 YUMA Almanac Format	61
50 APPENDIX 5: EXTENDED SIGNALS HEALTH STATUS FILES.....	62
50.1 Extended Signals Health Status	62
60 APPENDIX 6: ANTI-SPOOFING STATUS FILE.....	64
60.1 Anti-Spoofing Status.....	64
70 APPENDIX 7: LETTERS OF EXCEPTION	65
70.1 Scope.....	65
70.2 Applicable Documents.....	65
70.3 Letters of Exception.....	65

LIST OF TABLES

Table 3-I Information Product Information Exchange Matrix	12
Table 3-II not used	13
Table 3-III Transition & Support Information Exchange Matrix	13
Table 10-I Scheduled Outages	28
Table 10-II Unscheduled Outages	32
Table 10-III Other Types of NANU Messages	35
Table 10-IV NANU Notification Times	38
Table 40-I Six-Bit SV Health Word in Almanac	54
Table 40-II SEM Almanac Description for Current.al3 (Sheet 1 of 2)	57
Table 40-II SEM Almanac Description for Current.al3 (Sheet 2 of 2)	58
Table 40-III SEM Almanac Description for Current.bl3 (Sheet 1 of 2)	59
Table 40-III SEM Almanac Description for Current.bl3 (Sheet 2 of 2)	60
Table 50-I Modernized Civil Signals	62
Table 50-II ESHS Description	63

LIST OF FIGURES

Figure 3-1 Generic GPS Product Distribution Process.....	7
Figure 3-2 GPS Product End User Sequence Diagram.....	8
Figure 3-3 High Level GPS Product Ontology.....	9
Figure 3-4 Validate and Transform Utility Ontology.....	10
Figure 3-5 GPS Product Structure (XML native).....	14
Figure 3-6 GPS Public Product Distribution Overview.....	16
Figure 10-1 FCSTDV NANU Message Template.....	29
Figure 10-2 FCSTMX NANU Message Template.....	29
Figure 10-3 FCSTEXTD NANU Message Template.....	30
Figure 10-4 FCSTSUMM NANU Message Template.....	30
Figure 10-5 FCSTCANC NANU Message Template.....	31
Figure 10-6 FCSTRESC NANU Message Template.....	31
Figure 10-7 FCSTUUFN NANU Message Template.....	32
Figure 10-8 UNUSUFN NANU Message Template.....	33
Figure 10-9 UNUSABLE NANU Message Template.....	33
Figure 10-10 UNUNOREF NANU Message Template.....	34
Figure 10-11 General Message Format.....	35
Figure 10-12 USABINIT NANU Message Template.....	36
Figure 10-13 LEAPSEC NANU Message Template.....	36
Figure 10-14 LAUNCH NANU Message Template.....	37
Figure 10-15 DECOM NANU Message Template.....	37
Figure 10-16 NANU Message Template.....	39
Figure 10-17 NANU Header.....	39
Figure 10-18 Message Description.....	40
Figure 10-19 Reference Information.....	40
Figure 10-20 Satellite Identification Information.....	41
Figure 10-21 Outage Time.....	41
Figure 10-22 NANU Section 2.....	42
Figure 10-23 Contact Information.....	42
Figure 20-1 Sample Operational Advisory.....	43
Figure 20-2 OA Header.....	44
Figure 20-3 OA Section 1.....	44
Figure 20-4 OA Section 2.....	45
Figure 20-5 OA Section 3.....	45
Figure 40-1 SEM Data Sample for Current.al3.....	56
Figure 40-2 YUMA Almanac Data Sample For Current.alm.....	61
Figure 50-I Extended Signals Health Status Data Sample.....	62
Figure 60-1 Sample of the Anti-Spoofing Status file (as.txt).....	64

Figure 70-1 Letter of Exception..... 65

1 SCOPE

1.1 Scope

This Interface Control Document (ICD) defines the Public Release products generated by the Global Positioning System (GPS) Control Segment (CS) and the GPS public User community during the GPS Next Generation Operational Control System (OCX) era. This ICD describes the GPS products provided by the CS and the means by which these GPS products are distributed.

The GPS CS is operated by the 2d Space Operations Squadron (2 SOPS), administratively organized under 50th Space Wing (50 SW). The GPS User and User-support communities are comprised of the Department of Homeland Security (DHS) United States Coast Guard (USCG); Department of Transportation (DOT), Federal Aviation Administration (FAA); other Civil Users; and various GPS Users.

All GPS products and tools described in this ICD are unclassified and are publicly releasable per the current GPS CS mode of operations and the 50th SW Memorandum for Record - 2 SOPS GPS Public Release Policy.

In order to support Users who may not be able to update their code, the ASCII text file formats, as defined in Appendices 1-5, are not changing and ASCII text file Users are assured that they can continue to use these file types in the OCX era without changes to their systems. At the same time, the GPS CS announces that it has deprecated the ASCII text file formats and does not intend to make any future updates to these formats. Instead, any future additions or changes will only be captured in the modernized XML format messages. The GPS CS will still be required to coordinate a specific timeframe or process in a public ICWG for the removal of a currently supported file format.

The new or modified file formats: .nnu (updated NANU), .ale (new ESHS), .blm (new YUMA), .bl3 (new SEM), .oa1 (updated OA), and as2.txt (new A-S Status) handle a larger number of SVNs and/or PRNs and more clearly specify zero padding and whitespace so automated parsing can be done with less assumptions.

In this document, from here on, the term CS, which stands for Control Segment, will be used instead of OCX (where applicable). In the OCX era, the OCX System will be the GPS Control Segment; therefore, the CS will be performing the functions stated in this ICD.

1.2 Key Events and Transition Plans

The major milestone for implementation of this document is the initial operating capability of the GPS Next Generation Operational Control System (OCX). The Air Force will prepare for and assess operational readiness of OCX prior to deactivating the legacy control segment (AEP) and declaring OCX Ready to Transition to Operations (RTO).

The following transition strategy will ensure a low risk migration of users from the AEP era products (ICD-GPS-240) to the OCX era products (ICD-GPS-870), and then onward as future updates to OCX products are introduced;

- a) The CS may introduce new products and standards, yet will provide a means for supporting backward compatibility.
- b) New users and early adopters will be encouraged to adopt new products and features.
- c) Existing products within the ICD which are planned for retirement will be deprecated prior to being retired thus providing advance warning for users to initiate and complete migration away from the deprecated products.
- d) Users are encouraged to plan a migration to use the new GPS Products “as is” and thus eliminate the need for transition utilities.
- e) The GPS CS will still be required to coordinate a specific timeframe or process in a public ICWG for the removal of a deprecated product or service with a minimum of 12 months notice.

The legacy AEP era Internet Web Site to the user community (i.e., ICD-GPS-240), currently <https://gps.afspc.af.mil/gps>, will be manually maintained for a period of time not less than 6 months following OCX being declared RTO, providing a transition window for public users to migrate from using the legacy 2 SOPS web site to use the USCG Navigation Information Service (NIS).

A standards based approach to the GPS Products is employed in order to minimize the impact to the user community during transition. As a result, there are a wide variety of development COTS tools available to the users to independently develop tools to process the new GPS Products in their native (i.e. XML) formats. Government agencies are encouraged to work through the GPS Community POC for assistance during the transition.

1.3 Interface Control Document Approval and Changes

The Interface Control Contractor (ICC), designated by the government, is responsible for the basic preparation, approval, distribution, and retention of the ICD in accordance with the Interface Control Working Group (ICWG) charter GP-03-001.

The following signatories must approve this ICD to make it effective.

1. Air Force Space Command (AFSPC), GPS Directorate (GP) Space and Missile Systems Center (SMC)
2. Air Force Space Command (AFSPC), 50th Space Wing (50 SW)
3. OCX Contractor
4. Department of Homeland Security (DHS), United States Coast Guard (USCG), Navigation Center (NAVCEN)
5. Department of Transportation (DOT), Federal Aviation Administration (FAA)

Initial signature approval of this ICD can be contingent upon a letter of exception delineating those items by paragraph numbers that are not a part of the approval. Such letter of exception can be prepared by any of the signatories and must be furnished to the ICC for inclusion in the printed distribution of the officially released version of the ICD.

Changes to the approved version of this ICD can be initiated by any of the signatories and must be approved by all above signatories. The ICC is responsible for the preparation of the change pages, change coordination, and the change approval by all signatories. Designated signatories can approve proposed changes to this ICD without any increase in the scope of a specific contract by so specifying in a letter of exception. Such letters of exception must be furnished to the ICC for inclusion in the released version of the approved change and in the printed distribution of the approved ICD.

Whenever all of the issues addressed by a letter of exception are resolved, the respective signatory shall so advise the ICC in writing. When a portion of the exceptions taken by a signatory are resolved (but not all), the signatory shall provide the ICC with an updated letter of exception. Based on such notifications - without processing a proposed interface revision notice (PIRN) for approval - the ICC will omit the obsolete letter of exception from the next revision of the ICD and will substitute the new one (if required).

The typical review cycle for a PIRN is 45 days after receipt by individual addressees unless a written request for a waiver is submitted to the ICC.

2 APPLICABLE DOCUMENTS

2.1 Government Documents

The following documents of the issue specified contribute to the definition of the interfaces in this ICD and form a part of this ICD to the extent specified herein.

Specifications

Federal

None

Military

None

Other Government Activity

SS-CS-800 Current Version	GPS III Control Segment Specification Global Positioning Systems Wing (GPSW)
------------------------------	---

Standards

Federal

Version 2.1 (June 2006)	NIEM Information Exchange Package Documentation (IEPD) Specification
NDR 1.3	National Information Exchange Model (NIEM) Naming Design Rules
September 2008	Global Positioning System Standard Positioning Service Performance Standard

Military

September 2010	Department of Defense Public Key Infrastructure Functional Interface Specification 3.0.
----------------	--

Other Publications

IS-GPS-200 Current Version	Navstar GPS Space Segment / Navigation User Interface
IS-GPS-705 Current Version	Navstar GPS Space Segment / User Segment L5 Interfaces
IS-GPS-800 Current Version	Navstar GPS Space Segment / User Segment L1C Interfaces
GP-03-001A 20 April 2006	GPS Interface Control Working Group (ICWG) Charter
MOA February 1992	Memorandum of Agreement Between the United States Coast Guard and the United States Space Command, "Distribution of Navstar Global Positioning System (GPS) Status Information" (Signatories: USCG/G-NRN and USSPACECOM/DO)
MOA February 1996	Support Agreement Between the United States Coast Guard and the United States Air Force Space Command, "Distribution of Navstar Global Positioning System (GPS) Status Information" (Signatories: Commanding Officer NAVCEN and AFSPC/DO)
MOA February 2010	Memorandum of Agreement between the Joint Functional Component Command for Space the U.S. Coast Guard Navigation Center and the FAA National Operations Control Center with respect to the Support of Users of the Navstar Global Positioning System
MOA June 2014	Interagency Memorandum of Agreement with Respect to Support of Users of the Navstar Global Positioning System (GPS)
Fiscal Year 2014	Federal Radionavigation Plan (Signatories: Department of Homeland Security, Department of Transportation, Department of Defense)
MFR 30 June 2011	Department of the Air Force, 50th Space Wing (AFSPC) Memorandum for Record - 2 SOPS GPS Public Release Policy
6 February 2003	DODI 8500.2, Information Assurance (IA) Implementation
4 May 2011	United States Department of Defense X.509 Certificate Policy

2.2 Non-Government Documents

The following documents of the issue specified contribute to the definition of the interfaces in this ICD and form a part of this ICD to the extent specified herein.

Specifications

None

Standards

November 1999	W3C, XSL Transformations (XSLT) Version 1.0
January 2007	W3C, XSL Transformations (XSLT) Version 2.0
November 2008	W3C, Extensible Markup Language (XML) Version 1.0 (Fifth Edition)
June 2008	W3C, XML Signature Syntax and Processing (Second Edition)
October 2004	XML Schema Part 1: Structures, Second Edition, W3C Recommendation
October 2004	XML Schema Part 2: Structures, Second Edition, W3C Recommendation

Other Publications

None


3 REQUIREMENTS

3.1 Interface Identification

The USCG provides a Portal accessible from the public Internet to allow users, with a standard web browser, to discover and retrieve publicly releasable GPS products.

Figure 3-1 depicts a generalized GPS Product Distribution Process which begins with a *End-User* interacting with a GPS Product redistribution node (e.g., USCG NIS) to retrieve the desired GPS Products. The diagram reflects that a *potential data Corruption Source* actor may introduce data corruption at any time during this redistribution process. The GPS Product End-User may then validate and/or transform the Information Product before use in a Processing System. The roles of *Potential Data Corruption Source* and *GPS Product End-User* may be performed by the same or by different individuals.


Figure 3-1 Generic GPS Product Distribution Process

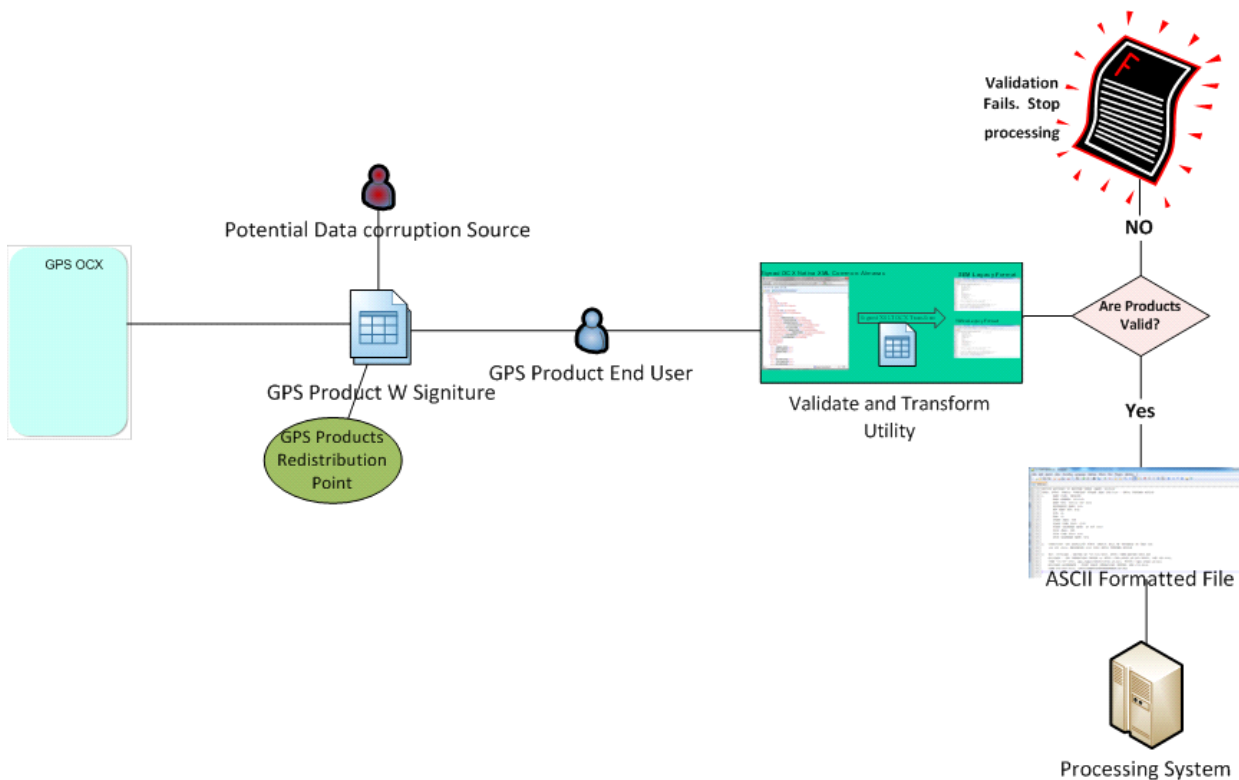

A GPS Product End User sequence diagram (see figure 3-2) is provided to further explain the intended use of the Validate and Transform Utility provided by the CS. An overview of the activities performed by the GPS Product End User follows;


- a) Validate - an optional step performed by the end user to ensure that the GPS Products have not been corrupted through the process of redistribution
- b) Transform - an optional step performed by end users who may need information in the ASCII text file formats before processing
- c) Process – use the GPS Information typically ingesting files using an end user Automated Information System (AIS)

Figure 3-2 GPS Product End User Sequence Diagram

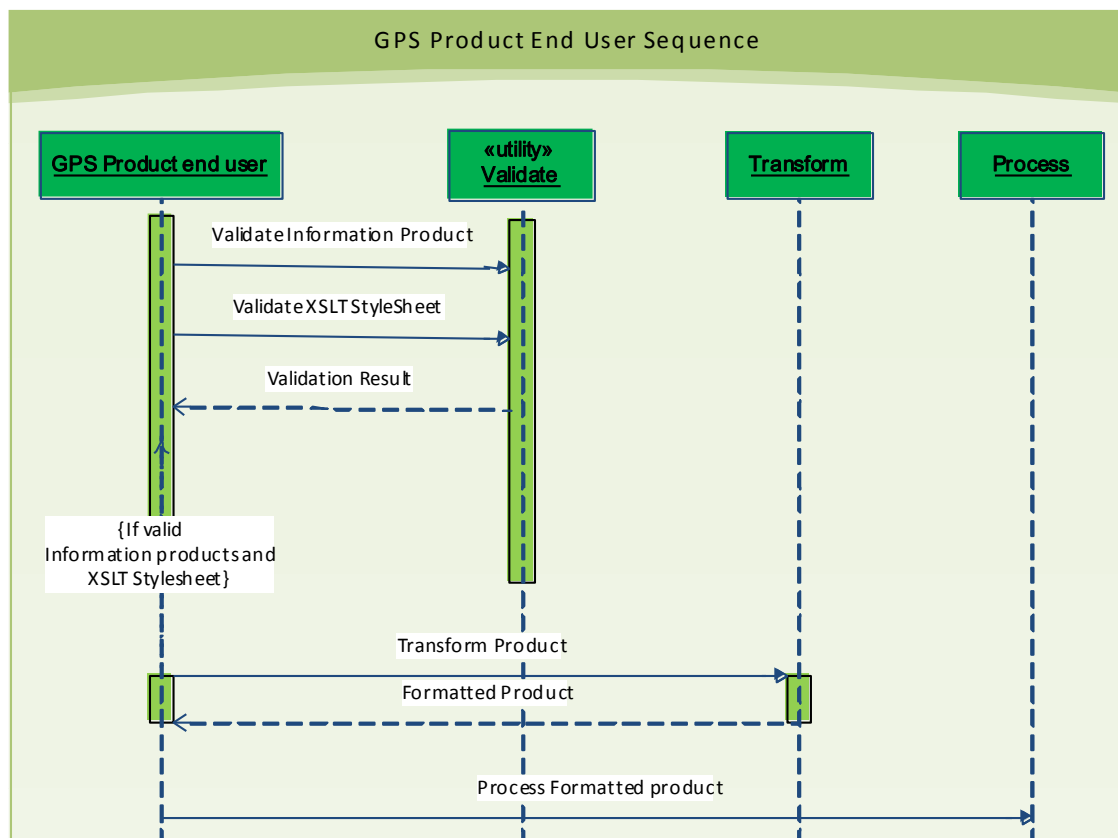

This ICD defines and then uses a GPS domain specific information exchange vocabulary which users should adopt when discussing the public GPS products. Figure 3-3 depicts a high level entity relationship diagram summarizing the GPS Product Ontology. This ontology captures the modernized GPS Product relationships including compliance with the latest government standards for data sharing and interoperability including National Information Exchange Model (NIEM).

Figure 3-3 High Level GPS Product Ontology

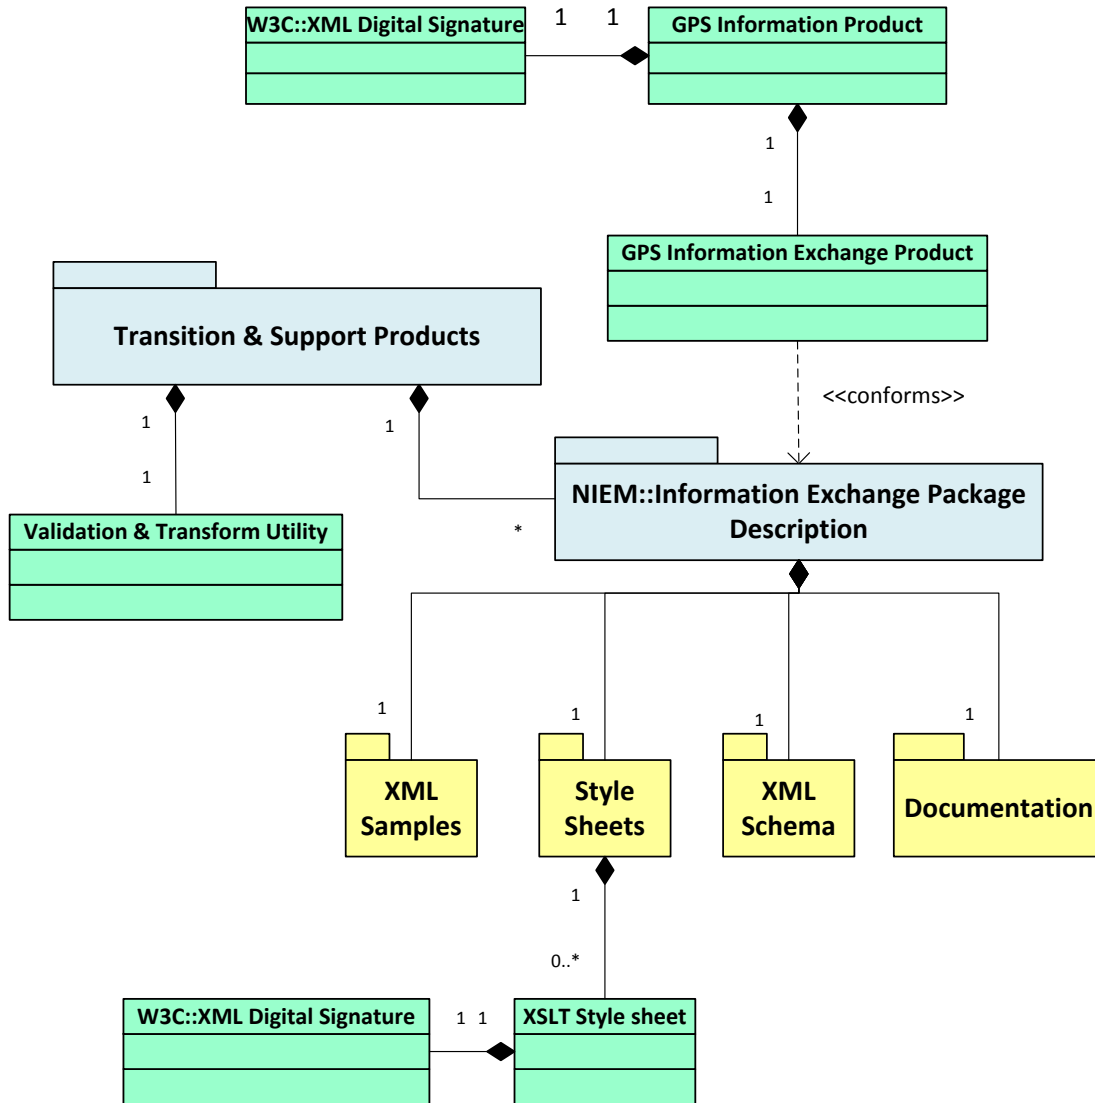

Appendices 1-5 of this ICD documents the minimum information content and formats which are required to achieve backward compatibility compliance. The GPS Ontology including Transition and Support Products will be published in the USCG NIS web site, currently <http://www.navcen.uscg.gov>.

The GPS CS will employ schema versioning whereby new data dissemination data/schema will be made available early in a pre-production form to allow synchronized development of automated ingestion and processing systems by users. In addition, operational data will be available in a production-full support form and in a production-deprecated form to allow graceful transition and retirement of obsolete data/schema.

The GPS CS XML based products will contain data sufficient to derive all ASCII text file content identified in Appendices 1-5.

The CS and the GPS Community will publish Information Products and Transition & Support Products. Products created by the CS have an associated XML Digital Signature as shown in Figure 3-3 and Figure 3-5.


- a) CS produced Information Products provide users with information about the state/status of the GPS System.
- b) GPS Community produced XML Schemas within the NIEM Information Exchange Package Description (IEPD) define the XML structures of the information products associated with this interface.
- c) CS produced Style Sheets within the IEPDs can be used to transform an Information Product into one of several formats supporting full backward compatibility with the ASCII text file formats.

The CS will publish different kinds of Information Products listed in Table 3-I. These GPS information products correspond with all legacy signals and the new Civil signals L1C, L2C and L5.

The CS will provide a utility for users to validate data integrity and if required to transform an Information Product into backward compatible ASCII file formats (see Appendix 1-6).

This utility is provided to avoid the need for users to perform near term development prior to transition to the OCX RTO. Figure 3-4 depicts a high level entity relationship diagram summarizing the Validation and Transform Utility Ontology. Users are encouraged to plan a migration to use the new GPS Products in their native (i.e., XML) format and thus eliminate the need for this utility.

Figure 3-4 Validate and Transform Utility Ontology

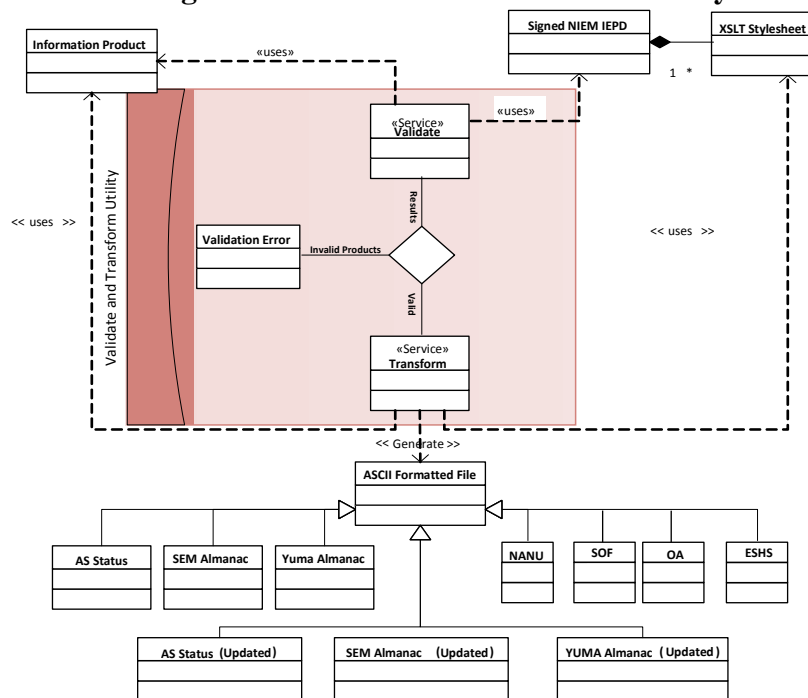

The products defined in this ICD are listed in Table 3-I and Table 3-II, in the form of information exchange matrices.

The CS provides Information Products as shown in Table 3-I.

All GPS Information products will comply with XML schemas as listed in Table 3-III.

The GPS Community provides Public Releasable Transition and Support Products for GPS authoritative data as listed in Table 3-III.

The Validate and Transform Utility will allow the user to validate the digital signature of GPS Information Products and its associated NIEM IEPD.

Given validated inputs, the Validate and Transform Utility will use XSLT stylesheets to produce the desired output format as listed in Table 3-III.

When a major revision to the schema becomes operational, the superseded schema version will remain available for a period of no less than 1 year after the new major revision is operationally available.

Minor revisions will be backward compatible within the same major revision.

Table 3-I Information Product Information Exchange Matrix

Producer	Modern & Legacy Data Exchange Identification	Description	Security Classification
CS	<p>Modern Identification: GPS Advisory</p> <p>Legacy Identification: Notice Advisory to Navstar Users (NANU)</p>	<p>The GPS Advisory exchange information product includes a single advisory notification concerning a GPS space event and associated GPS space vehicle. See GPS Advisory IEPD for more details.</p> <p>Published on a periodic basis, based on operational events/needs.</p>	Unclassified / Open / Public Releasable
CS	<p>Modern Identification: GPS Advisory Collection</p> <p>Legacy Identification: Satellite Outage File (SOF)</p>	<p>The GPS Advisory Collection Exchange information product includes a collection of advisory notifications of all available historical, current and predicted satellite outage space events. See GPS Advisory IEPD for more details.</p> <p>Produced in response to the generation of a GPS Advisory (NANU) by the CS.</p>	Unclassified / Open / Public Releasable
CS	<p>Modern Identification: Ops Status</p> <p>Legacy Identification: Operational Advisory (OA)</p>	<p>The Ops Status Exchange information product includes an Ops Status notification concerning the GPS constellation and relevant GPS space events. See Ops Status IEPD for more details.</p> <p>Nominally published once daily.</p>	Unclassified / Open / Public Releasable
CS	<p>Modern Identification: Public Common Almanac</p> <p>Legacy Identification: (1) GPS Almanacs (SEM,YUMA) (2) Anti-Spoof Status (3) ESHS</p>	<p>The Public Common Almanac Exchange information product includes orbital state and health status of the GPS constellation. See Public Common Almanac IEPD for more details.</p> <p>Nominally published once daily.</p>	Unclassified / Open / Public Releasable

Table 3-II not used

Table 3-III Transition & Support Information Exchange Matrix

Producer	Data Exchange Identification	Information Description	Security Classification	Included Transformation Stylesheet(s)
GPS Community	GPS Advisory IEPD	A collection of artifacts that describe the construction and content (including schemas, transformation stylesheets, etc.) of a GPS Advisory information exchange. Published on a periodic basis with each new schema version.	Unclassified / Open / Public Releasable	NANU.XSL: Stylesheet for producing ASCII formatted ICD-870 Appendix 1 NANU Data Format. SOF.XSL: Stylesheet for producing ASCII formatted ICD-870 Appendix 3 Operational SOF Data Format.
GPS Community	Ops Status IEPD	A collection of artifacts that describe the construction and content (including schemas, transformation stylesheets, etc.) of a GPS Ops Status Advisory information exchange. Published on a periodic basis with each new schema version.	Unclassified / Open / Public Releasable	OpsAdvisory.XSL: Stylesheet for producing ASCII formatted ICD-870 Appendix 2 Operational Advisory Data File Format
GPS Community	Public Common Almanac IEPD	A collection of artifacts that describe the construction and content (including schemas, transformation stylesheets, etc.) of a GPS Public Common Almanac information exchange. Published on a periodic basis with each new schema version.	Unclassified / Open / Public Releasable	SEMAL3.XSL: Stylesheet for producing ASCII formatted ICD-870 Appendix 4 SEM (AL3) Almanac Data File Format
				SEMBL3.XSL: Stylesheet for producing ASCII formatted ICD-870 Appendix 4 SEM (BL3) Almanac Data File Format
				YUMAALM.XSL: Stylesheet for producing ASCII formatted ICD-870 Appendix 4 YUMA (ALM) Almanac Data File Format
				YUMABLM.XSL: Stylesheet for producing ASCII formatted ICD-870 YUMA (BLM) Almanac Data File Format
				ESHSALE.XSL: Stylesheet for producing ASCII formatted ICD-870 Appendix 5 ESHS File Format
				ASStatus.XSL: Stylesheet for producing ASCII formatted ICD-870 Appendix 6 AS Status File Format
				ASStatus AS2.XSL: Stylesheet for producing ASCII formatted ICD-870 Appendix 6 AS Status File Format

The CS will employ schema versioning whereby new data/schema will be available in a non-operational pre-production form to support integration, test and transition. In addition, operational data will be available in a production-full support form and in a production-deprecated form to allow graceful transition and retirement of obsolete data/schema.

Note: Information on release of a new major schema revision will be accomplished through the public ICWG process.

3.1.2 GPS Control Segment

The GPS CS is operated by the 2d Space Operations Squadron (2 SOPS), administratively organized under 50th Space Wing (50 SW). The GPS CS operations are performed primarily via the Master Control Station (MCS), Alternate Master Control Station (AMCS), Monitor Stations (MS), and Ground Antennas (GA).

The MCS, located at Schriever Air Force Base (SAFB), is the central control point for the GPS CS. For this interface, the MCS is responsible for generating the Information Products in Table 3-I and providing these to the USCG NAVCEN for redistribution to the public. The AMCS, located at Vandenberg AFB (VAFB), is functionally identical to the MCS; either MCS facility is capable of controlling the GPS constellation for an indefinite period. In case the MCS experiences downtime, the AMCS takes over this interface function. The term “MCS”, as now used throughout this document, refers to either the MCS or the AMCS, whichever MCS facility actively controls the GPS constellation.

The MSs and GAs do not play a role in this interface.

As depicted in Figure 3-5, all GPS Information Products will comply with the following standards:


- W3C, Extensible Markup Language (XML)
- W3C XML Signature Syntax and Processing Standard

The stylesheet transformations within the IEPD, as depicted in Figure 3-3 and which can be used to convert Information Products into the various legacy formats, will comply with the following additional standard:

- W3C, XSL Transformations (XSLT)

The XML schema within the IEPD, as depicted in Figure 3-3, will comply with W3C XML Schema Standards.

Figure 3-5 GPS Product Structure (XML native)

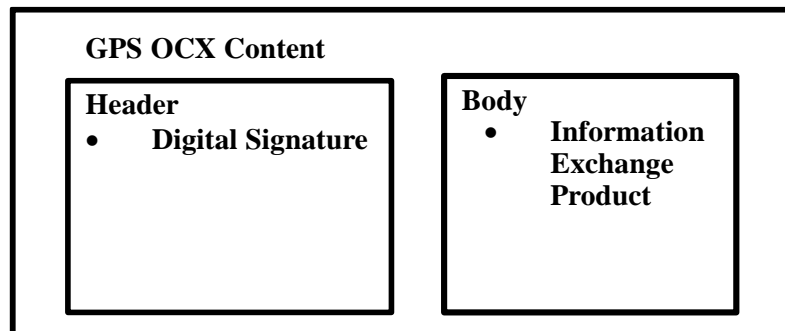

3.1.3 GPS User and User-support communities

The GPS User and User-support communities include the Civil Users which are comprised of the Department of Homeland Security (DHS), United States Coast Guard (USCG); Department of Transportation (DOT), Federal Aviation Administration (FAA); other Civil Users.

3.2 Interface Definitions

3.2.1 Generation of Public Common Almanac Product

The GPS CS generates the Public Common Almanac Information Product for the GPS constellation. The satellite Common Almanac contains orbital and performance parameters for operational GPS satellites, the health status of each of the modernized civil signals available for each SV - L1C, L2C and L5, as well as A-S status Information. As shown in Table 3-III, two ASCII System Effectiveness Model (SEM) format Almanacs plus two ASCII YUMA format Almanacs and one ASCII Extended Signals Health Status (ESHS) format Almanac can be produced using the Common Almanac Information Product along with provided XSLT stylesheet. Detailed ASCII data formats of the SEM (current.al3 and current.bl3) and YUMA Almanac (current.alm and current.blm) data are described in Appendix 4 of this ICD. Detailed ASCII data formats of the ESHS Almanac data (current.ale) are described in Appendix 5 of this ICD.

3.2.2 Generation of Ops Status Product

The GPS CS will generate the Ops Status Information Product for the GPS constellation.

The Ops Status information product is a descriptive summary of GPS constellation status. As shown in Table 3-III, ASCII O-A formats can be produced using the Ops Status Information Product and the provided XSLT stylesheet. Detailed ASCII data formats of the OA data file (current.oa1) are described in Appendix 2 of this ICD.

3.2.3 Generation of GPS Advisory Product

The GPS CS will generate the GPS Advisory Information Product for the GPS constellation.

The GPS Advisory Information Product is a message that informs Users of satellite outages and other GPS issues. As shown in Table 3-III, the ASCII formats can be produced using the GPS Advisory Information Product and the provided XSLT stylesheet. Detailed ASCII data formats of the NANU (current.nnu) data are described in Appendix 1 of this ICD.

3.2.4 Legacy Anti-Spoofing (A-S) Status

The CS will generate newly created Public Common Almanac Information Product from which, as shown in Table 3-III, the Anti-Spoofing Status will be produced using the XSLT stylesheet. The detailed ASCII data formats of the A-S Status files (as.txt and as2.txt) are described in Appendix 6 of this ICD.

3.2.5 Data Distribution

The USCG provides a Portal accessible from the public Internet to allow users, with a standard web browser, to discover and retrieve publicly releasable GPS products.

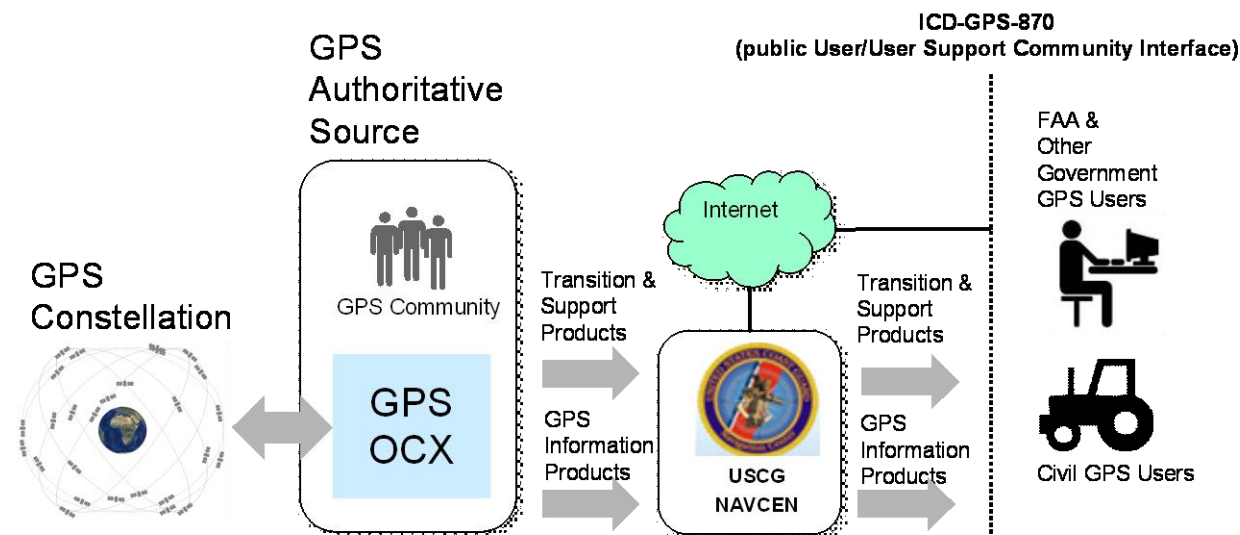


Figure 3-6 GPS Public Product Distribution Overview

As shown in Figure 3-6, the NAVCEN Information System (NIS) is the distribution point for authoritative GPS Products disseminated to the public. The NAVCEN receives these products from the GPS Control Segment (OCX) and the GPS community (led by the Air Force GPS Program Office). The GPS products consist of regularly published operational GPS information products (see Table 3-I) as well as Transition and Support Products (see Table 3-III).

GPS Advisory Information Products are provided whenever they are generated including weekends and holidays. Ops Status and Common Almanac Information Products are normally provided once per day, 24/7, 365 days a year, prior to 1700 Zulu time (10 am MST, 11 am MDT).

3.3 GPS MCS to GPS User Support Community Data Integrity

As the Authoritative Source for GPS Information Products described in this ICD, the CS publishes only digitally signed GPS Products to improve information assurance for GPS data at rest (i.e., resident on a storage device) within the GPS user community. Without digital signatures to ensure the integrity and proof of origin of the GPS Products at rest, Information Products originally from the CS could be corrupted (intentionally or unintentionally) during redistribution to the end user. The potential consequence of corrupted GPS Information products varies between end users. Some end users have Information Assurance critical applications (e.g. public utilities, safety of life systems) in which the potential consequence are significant and therefore unacceptable to the end user. Therefore;

- a) The CS will only distribute GPS Products (see section 3.1.1) which are digitally signed XML documents per the published XML schema for compliance with modern Net Centric and Information Assurance standards for non-repudiation.
- b) The GPS Community provides Digitally signed IEPDs which include XSLT stylesheets that can be used in conjunction with the Validate and Transform Utility to assist users with first validating then transforming GPS Information Products into backward compatible ASCII formats.
- c) In order to maximize the benefit of information assurance, the CS recommends that End Users perform the transformation step as late as possible (just prior to ingesting).
- d) Validating the data integrity of GPS products is optional and is the responsibility of the user. End users must apply their knowledge of the criticality of their application in making the determination of whether they can accept the risks of ignoring CS provided digital signatures.
- e) Any US government user interested in redistributing GPS Products or products derived from GPS Products are advised to consult with the GPS Community before doing so to understand the tradeoffs and verify duplicative efforts are not being planned by the GPS Community.

Those consumers not interested in verifying the data integrity of GPS Information Products can simply use the messages. The requirement is upon the GPS CS to provide data integrity and it is OPTIONAL for the consumer to take the steps needed to verify the integrity of the data. The following paragraphs describe what the GPS CS is required to do and optionally what the consumer would need to do to verify that a message is genuine and originates from the GPS CS.

The GPS CS will use DoD Public Key Infrastructure (PKI) to digitally sign all GPS Products as listed in Tables 3-I and 3-III and as per Department of Defense Public Key Infrastructure Functional Interface Specification 3.0.

Digital signatures will use the Rivest-Shamir-Adleman (RSA) public key algorithm with 2048 bit keys and Secure Hash Algorithm-256 (SHA-256) for signatures.

As depicted in Figure 3-5, the header elements of the GPS Product OCX Content will contain the XML digital signature for the **entire** GPS Information Product (excluding the signature itself). This method of digital signing is referred to as an enveloped signature as defined in the W3C Signature Syntax Processing.

As shown in Figure 3-2, the steps for a user to verify the data integrity where the user has an application which directly processes ASCII text file formats:

1. Download the desired Information Product and associated IEPD (see Table 3-III) from USCG NIS web site or an alternate redistribution site. Note: Because the IEPD for an Information Product will change very infrequently, this step could be performed once for a new IEPD revision and then reused repeatedly without downloading again.
2. Just prior to use, validate the Digital Signature of the Information Product and the Signed IEPD containing the XSLT stylesheets using compliant standard COTS/Library and the currently published CS public certificate.
3. If the signatures do not validate in Step 2, then either the Information Product or the signed IEPD is not authentic (not produced by the CS) or has been corrupted. Do not use. The user should return to step 1.
4. If the signatures validate in both Step 2 and Step 3, then apply the XSLT stylesheet using standard COTS/Library to produce the desired ASCII file format.

Note: A user with a non-critical application who intends to bypass verifying data integrity only needs to perform Step 1 and then Step 4.

Note: The provided Validate and Transform Utility (see figure 3-4) can be used to perform steps 2, 3 and 4. The user is required to download/install the CS public key on their system prior to using the Validate and Download Utility.

As shown in Figure 3-2, the steps for a user to verify the data integrity where the user has a modern application which directly processes CS native XML formats;

1. Download the desired Information Product (see Table 3-III) from the USCG NIS web site.
2. Just prior to use, Validate the Digital Signature of Information Product using a W3C XML Digital Signature Compliant standard COTS/Library and the currently published CS public certificate.
3. If the signature does not validate in Step 2, then the Information product is either not authentic (not produced by the CS) or the information content has been corrupted. Do not use. The user should return to step 1.
4. If the signature validates in Step 2, then the GPS Information Product is authentic and the content has not been corrupted.

Note: A user with a modern non-critical application who intends to bypass verifying data integrity only needs to perform Step 1.

Note: The provided Validate and Transform Utility (see figure 3-4) can be used to perform step 2. The user is required to download/install the CS public key on their system prior to using the Validate and Download Utility.

The GPS CS will support modular addition or replacement of DoD PKI algorithms, key lengths, certificate authorities, certificates, and certificate structure. Coordination in a public ICWG will occur prior to any changes on the Public Release interface.

The GPS CS unclassified certificate (and corresponding CS public key) will be made available to all consumers for data integrity verification via the USCG NIS web site.

In this document, X.509 certificates are referred to as certificates.

DoD PKI root certificates are available on the DoD Class 3 Public Key Infrastructure (PKI) website, currently <http://dodpki.c3pki.chamb.disa.mil/>, to verify the certificate chain.

The USCG Portal will make the standalone offline Validate and Transform utility available on the public Internet.

This utility will present the user with a simple User Interface to validate the integrity of any GPS Information Product and/or XSLT stylesheet included in the IEPDs as well as to optionally apply the appropriate XSLT stylesheet transform.

The CS Validate and Transform Utility will be installable on supported versions of Windows and Linux platforms.

User platform requirements for running the Validate and Transform Utility will be described on the USCG NIS website. The Utility will be digitally signed and users should validate the Authenticity of the certificate during installation.

3.3.1 Digital Signatures

All of the GPS Information Products will be digitally signed.

All XSLT stylesheets will be signed using detached XML digital signatures with the signature stored on separate files as shown in Figure 3-3.

The CS will publish only digitally signed GPS Information Products to improve information assurance for GPS data at rest (ie. resident on a storage device) within the GPS user community as listed in Table 3-I.

A message will always have its corresponding signature available to the consumer to verify the message independent of the delivery protocol.

4 QUALITY ASSURANCE

This section contains the verification matrix for the objects that contain requirements enumerated in this interface document. The verification matrix indicates what methodology will be used to assure these requirements are met. The information contained within this verification matrix is not intended to change any contractual obligations imposed upon the segment contractors by the government. Regardless of Highest Verification Level designation (System or Segment), the segment contractors still need to demonstrate compliance to all contractual interface documents.

The column headings of the verification matrix are explained here:

DOORS ID = Unique DOORS object identification number.

Object Number = Paragraph number of the object.

CS Effectivity = Effectivity of requirement allocated to CS (see Segment column) as defined in SS- CS- 800.

SS Effectivity = Effectivity of requirement allocated to SS (see Segment column) as defined in SS- SS- 800.

Highest Verification Level = The highest level (System or Segment) at which the requirement is verified. The Highest Verification Level is used to identify those requirements that require joint verification activity as explained below:

A designation of System implies the requirement must be verified by a joint verification activity that includes both sides of the interface and may involve coordination of verification activities through the government.

A designation of Segment implies the segment contractor retains full responsibility for conducting the verification event. The joint use of SS or CS assets such as the GSYS or GSS does not alter the Highest Verification Level designation from Segment.

Segment = Designated segment (Space (SV), Control (CS), or User (US) Segment) involved in the verification of the requirement. A designation of (EXTERNAL ORG) is used to identify the external organization (e.g., (NDS), (AFSCN), (NGA), etc.) involved in the verification of the requirement.

System Verification Method = Method for verifying system requirements. Verification method assignments for segment requirements will not be tracked in this ICD as they are formally described in the segment contractor verification planning CDRLs. The following verification method definitions are derived from SS-SYS-800.

Verification by Inspection (I)

The inspection method verifies conformance of physical characteristics to related requirements without the aid of special laboratory equipment, procedures, and services. This method most commonly uses an examination by the senses (sight, sound, smell, taste, or touch) to determine requirements compliance and may also rely on gauges or simple measures.

Verification by Analysis (A)

The analysis method verifies conformance to requirements based on studies, calculations, and modeling, or is based on the certified usage of similar components under identical or similar operating conditions (similarity). This method may consist of the technical evaluation of data using logic or mathematics to determine compliance with requirements. It is typically used in verification when a given attribute is impossible or extremely difficult to test, thereby enabling expansion of the verification beyond the range of the test. Review of software listings is considered to be verification by analysis.

Verification by Demonstration (D)

The demonstration method verifies the required operability of hardware and software by means that do not necessarily require the use of laboratory equipment, procedures, items or services. That is, compliance with requirements is verified by operation and function. More detail may be seen in MIL-HDBK-470 and MIL-STD-810. This method may be an un-instrumented test, with compliance determined by observation (e.g., maintenance task performance time).

Verification by Test (T)

The test method verifies conformance to required performance/physical characteristics and design/construction features by instrumented functional operation and evaluation techniques through the use of laboratory equipment procedures, items, and services. This method generally uses procedures and test/measuring equipment to verify compliance with requirements.

5 PREPARATION FOR DELIVERY

Not Applicable

6 NOTES

6.1 Acronyms and Abbreviations

2 SOPS	2d Space Operations Squadron
50 SW	50 th Space Wing
A-S	Anti-Spoofing
AFB	Air Force Base
AFSPC	Air Force Space Command
AMCS	Alternate Master Control Station
ANOM	Anomaly
ASCII	American Standard Code for Information Interchange
CS	Control Segment, Cesium
DD	Calendar Day (2 digits)
DECOM	Decommission
DHS	Department of Homeland Security
DO	Director of Operations
DOD	Department of Defense
DOT	Department of Transportation
DSN	Defense Switched Network
DTG	Day Time Group
e-mail	Electronic mail
ESHS	Extended Signals Health Status
FAA	Federal Aviation Administration
FCSTCANC	Forecast Cancellation
FCSTDV	Forecast Delta-V
FCSTEXTD	Forecast Extension
FCSTMX	Forecast Maintenance
FCSTRESCD	Forecast rescheduled
FCSTSUMM	Forecast Summary
FCSTUUFN	Forecast Unusable Until Further Notice
G-NRN	Radio Navigation Division
GA	Ground Antenna
GP	Global Positioning System Directorate
GPS	Global Positioning System
GPSOC	GPS Operations Center
GPSW	GPS Wing
HDBK	Handbook
HH	Hour (2 digits)
HTTP	Hypertext Transfer Protocol

HTTPS	Hypertext Transfer Protocol Secure
ICC	Interface Control Contractor
ICD	Interface Control Document
ICWG	Interface Control Working Group
ID	Identification
IERS	International Earth Rotation and Reference Systems Service
IP	Internet Protocol
IS	Interface Specification
JDAY	Julian Day of the Year
JJJ	Julian Date (3 digits)
LEAPSEC	Leap Second
LSB	Least Significant Bit
M	Meters
MCS	Master Control Station
MDT	Mountain Daylight Time
MIL	Military
MM	Minutes (2 digits)
MMM	Month (3 characters)
MOA	Memorandum of Agreement
MS	Monitor Station
MST	Mountain Standard Time
N/A	Not Applicable
NANU	Notice Advisory to Navstar Users
NAV	Navigation
NAVCEN	Navigation Center
NC	No Change
NNN	NANU Number (3 digits)
NOTAM	Notice to Airmen
OA	Operational Advisory
OCX	Next Generation Operational Control System
PIRN	Proposed Interface Revision Notice
PKI	Public Key Infrastructure
POC	Point Of Contact
PRN	Pseudorandom Noise (Signal Number)
RAD	Radians
RB	Rubidium
RFC	Request for Change
s	Seconds

SAFB	Schriever Air Force Base
SAIC	Science Applications International Corporation
SE&I	Systems Engineering and Integration
SEM	System Effectiveness Model
SIPRNet	Secret Internet Protocol Router Network
SMC	Space and Missile Systems Center
SPS	Standard Positioning Service
SQRT	Square Root
SUBJ	Subject
SS	System Specification
SSS	Seconds (3 digits)
STD	Standard
SV	Space Vehicle
SVID	Space Vehicle Identification
SVN	Space Vehicle Number
TBD	To Be Determined
TCP	Transmission Control Protocol
UNUNOREF	Unusable with no reference
UNUSABLE	Unusable with reference NANU
UNUSUFN	Unusable Until Further Notice
URA	User Range Accuracy
USABINIT	Initially usable
USCG	United States Coast Guard
USNOF	United States Notice to Airmen Office
USSPACECOM	United States Space Command
UTC	Coordinated Universal Time
VAFB	Vandenberg Air Force Base
WN	Week Number
YYYY	Year (4 digits)
Z	Zulu

7 APPROVAL

The signatories have approved this ICD with or without exception as their signature block implies and a copy of each approval sheet is included in this section.

10 APPENDIX 1: NANU DATA FORMATS

Appendix 1 describes the NANU types and the NANU message format.

10.1 Notice Advisory to Navstar Users

NANUs are used to notify Users of scheduled and unscheduled satellite outages and general GPS information. An outage is defined to be a period of time that the satellite is removed from service and not available for use. Operators determine the satellite meets the conditions for "unhealthy" provided in Section 2.3.2 of the Standard Positioning Service Performance guide. The paragraphs that follow describe the different types of NANUs. The NANU descriptions are arranged into four groups, as follows:

- Scheduled outages
- Unscheduled outages
- General text message
- Others

10.1.1 Scheduled Outages

NANU types in the scheduled outage group forecast outages that are planned to begin in the near future. Table 10-I identifies NANU types in the scheduled outage group. The table describes the NANU acronym used in the message format, the name of the file and a description of the outages. NANU acronyms in this group all begin with "FCST" for "forecast."

Table 10-I Scheduled Outages

NANU ACRONYM	NAME	DESCRIPTION
FCSTDV	Forecast Delta-V	Scheduled outage times for Delta-V maneuvers.
FCSTMX	Forecast Maintenance	Scheduled outage times for non-Delta-V maintenance.
FCSTEXTD	Forecast Extension	Extends the scheduled outage time “Until Further Notice”; references the original forecast NANU.
FCSTSUMM	Forecast Summary	Exact outage times for the scheduled outage. This is sent after the maintenance is complete and the satellite is set healthy. It references the original forecast NANU. If a FCSTEXTD or a FCSTRESCD were required the FCSTSUMM will reference these.
FCSTCANC	Forecast Cancellation	Cancels a scheduled outage when a new maintenance time is not yet determined; it references the original forecast NANU message. May be issued after the start time of the referenced NANU.
FCSTRESCD	Forecast rescheduled	Reschedules a scheduled outage referencing the original-FCST NANU message.
FCSTUUFN	Forecast Unusable Until Further Notice	Scheduled outage of indefinite duration not necessarily related to Delta-V or maintenance activities.

The message templates for the NANU types listed in Table 10-I are shown in Figures 10-1 through 10-7, respectively.

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYSSS
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE JDAY JJJ/HHMM - JDAY JJJ/HHMM
1.  NANU TYPE: FCSTDV
    NANU NUMBER: YYYYSSS
    NANU DTG: DDHHMMZ MMM YYYY
    REFERENCE NANU: N/A
    REF NANU DTG: N/A
    SVN: XXX
    PRN: XX
    START JDAY: JJJ
    START TIME ZULU: HHMM
    START CALENDAR DATE: DD MMM YYYY
    STOP JDAY: JJJ
    STOP TIME ZULU: HHMM
    STOP CALENDAR DATE: DD MMM YYYY

2.  CONDITION: GPS SATELLITE SVNXXX (PRNXX) WILL BE UNUSABLE ON JDAY JJJ
    (DD MMM YYYY) BEGINNING HHMM ZULU UNTIL JDAY JJJ (DD MMM YYYY) ENDING HHMM ZULU.

3.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-1 FCSTDV NANU Message Template

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYSSS
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE JDAY JJJ/HHMM - JDAY JJJ/HHMM
1.  NANU TYPE: FCSTMX
    NANU NUMBER: YYYYSSS
    NANU DTG: DDHHMMZ MMM YYYY
    REFERENCE NANU: N/A
    REF NANU DTG: N/A
    SVN: XXX
    PRN: XX
    START JDAY: JJJ
    START TIME ZULU: HHMM
    START CALENDAR DATE: DD MMM YYYY
    STOP JDAY: JJJ
    STOP TIME ZULU: HHMM
    STOP CALENDAR DATE: DD MMM YYYY

2.  CONDITION: GPS SATELLITE SVNXXX (PRNXX) WILL BE UNUSABLE ON JDAY JJJ
    (DD MMM YYYY) BEGINNING HHMM ZULU UNTIL JDAY JJJ (DD MMM YYYY)
    ENDING HHMM ZULU.

3.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-
    2493, GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-2 FCSTMX NANU Message Template

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYSSS
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE EXTENDED UNTIL FURTHER NOTICE
1.  NANU TYPE: FCSTEXTD
    NANU NUMBER: YYYYSSS
    NANU DTG: DDHHMMZ MMM YYYY
    REFERENCE NANU: YYYYNNN
    REF NANU DTG: DDHHMMZ MMM YYYY
    SVN: XXX
    PRN: XX
    START JDAY: JJJ
    START TIME ZULU: HHMM
    START CALENDAR DATE: DD MMM YYYY
    STOP JDAY: UFN
    STOP TIME ZULU: N/A
    STOP CALENDAR DATE: N/A

2.  CONDITION: THE FORECAST OUTAGE FOR GPS SATELLITE SVNXXX (PRNXX) IS EXTENDED UNTIL
    FURTHER NOTICE.

3.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-3 FCSTEXTD NANU Message Template

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYSSS
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE SUMMARY JDAY JJJ/HHMM - JDAY JJJ/HHMM
1.  NANU TYPE: FCSTSUMM
    NANU NUMBER: YYYYSSS
    NANU DTG: DDHHMMZ MMM YYYY
    REFERENCE NANU: YYYYNNN
    REF NANU DTG: DDHHMMZ MMM YYYY
    SVN: XXX
    PRN: XX
    START JDAY: JJJ
    START TIME ZULU: HHMM
    START CALENDAR DATE: DD MMM YYYY
    STOP JDAY: JJJ
    STOP TIME ZULU: HHMM
    STOP CALENDAR DATE: DD MMM YYYY

2.  CONDITION: GPS SATELLITE SVNXXX (PRNXX) WAS UNUSABLE ON JDAY JJJ
    (DD MMM YYYY) BEGINNING HHMM ZULU UNTIL JDAY JJJ (DD MMM YYYY)
    ENDING HHMM ZULU.

3.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-4 FCSTSUMM NANU Message Template


```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYSSS
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE CANCELLED
1.  NANU TYPE: FCSTCANC
    NANU NUMBER: YYYYYSSS
    NANU DTG: DDHHMMZ MMM YYYY
    REFERENCE NANU: YYYYYNNN
    REF NANU DTG: DDHHMMZ MMM YYYY
    SVN: XXX
    PRN: XX
    START JDAY: JJJ
    START TIME ZULU: HHMM
    START CALENDAR DATE: DD MMM YYYY
    STOP JDAY: CANCELLED
    STOP TIME ZULU: N/A
    STOP CALENDAR DATE: N/A

2.  CONDITION: THE FORECAST OUTAGE FOR GPS SATELLITE SVNXXX (PRNXX) SCHEDULED FOR
    JDAY JJJ (DD MMM YYYY) BEGINNING HHMM ZULU HAS BEEN CANCELLED.

3.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-5 FCSTCANC NANU Message Template

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYSSS
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE RESCHEDULED
1.  NANU TYPE: FCSTRESCD
    NANU NUMBER: YYYYYSSS
    NANU DTG: DDHHMMZ MMM YYYY
    REFERENCE NANU: YYYYYNNN
    REF NANU DTG: DDHHMMZ MMM YYYY
    SVN: XXX
    PRN: XX
    START JDAY: JJJ
    START TIME ZULU: HHMM
    START CALENDAR DATE: DD MMM YYYY
    STOP JDAY: JJJ
    STOP TIME ZULU: HHMM
    STOP CALENDAR DATE: DD MMM YYYY

2.  CONDITION: GPS SATELLITE SVNXXX (PRNXX) WILL BE UNUSABLE ON JDAY JJJ
    (DD MMM YYYY) BEGINNING HHMM ZULU UNTIL JDAY JJJ (DD MMM YYYY)
    ENDING HHMM ZULU. PLEASE REFERENCE NANU NUMBER YYYYYNNN
    DTG DDHHMMZ MMM YYYY FOR THE ORIGINAL OUTAGE TIME.

3.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-6 FCSTRESC NANU Message Template

```

NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYSSS
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE JDAY JJJ/HHMM - UNTIL FURTHER NOTICE
1.  NANU TYPE: FCSTUUFN
    NANU NUMBER: YYYYYSSS
    NANU DTG: DDHHMMZ MMM YYYY
    REFERENCE NANU: N/A
    REF NANU DTG: N/A
    SVN: XXX
    PRN: XX
    START JDAY: JJJ
    START TIME ZULU: HHMM
    START CALENDAR DATE: DD MMM YYYY
    STOP JDAY: UFN
    STOP TIME ZULU: N/A
    STOP CALENDAR DATE: N/A

2.  CONDITION: GPS SATELLITE SVNXXX (PRNXX) WILL BE UNUSABLE NO EARLIER THAN JDAY JJJ
    (DD MMM YYYY) BEGINNING HHMM ZULU UNTIL FURTHER NOTICE.

3.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL

```

Figure 10-7 FCSTUUFN NANU Message Template

10.1.2 Unscheduled Outages

NANU types in the unscheduled outage group describe unplanned outages that are ongoing or have occurred in the recent past. Table 10-II identifies NANU types in the unscheduled outage group. The table describes the NANU acronym used in the message format, the name of the file and a description of the outages. NANU acronyms in this group all begin with “UNU” or “UNUS” for “unusable.”

Table 10-II Unscheduled Outages

NANU ACRONYM	NAME	DESCRIPTION
UNUSUFN	Unusable Until Further Notice	Notifies Users that a satellite will be unusable to all Users until further notice.
UNUSABLE	Unusable with reference NANU	Closes out an UNUSUFN NANU and gives the exact outage times; references the UNUSUFN NANU
UNUNOREF	Unusable with no reference	Gives times for outages that were resolved before an UNUSUFN NANU could be sent.

The message templates for the NANU types listed in Table 10-II are shown in Figures 10-8 through 10-10, respectively.

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYSSS
SUBJ: SVNXXX (PRNXX) UNUSABLE JDAY JJJ/HHMM - UNTIL FURTHER NOTICE
1.  NANU TYPE: UNUSUFN
    NANU NUMBER: YYYYSSS
    NANU DTG: DDHHMMZ MMM YYYY
    REFERENCE NANU: N/A
    REF NANU DTG: N/A
    SVN: XXX
    PRN: XX
    START JDAY: JJJ
    START TIME ZULU: HHMM
    START CALENDAR DATE: DD MMM YYYY
    STOP JDAY: UFN
    STOP TIME ZULU: N/A
    STOP CALENDAR DATE: N/A

2.  CONDITION: GPS SATELLITE SVNXXX (PRNXX) WILL BE UNUSABLE ON JDAY JJJ
    (DD MMM YYYY) BEGINNING HHMM ZULU UNTIL FURTHER NOTICE.

3.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-8 UNUSUFN NANU Message Template

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYSSS
SUBJ: SVNXXX (PRNXX) UNUSABLE JDAY JJJ/HHMM - JDAY JJJ/HHMM
1.  NANU TYPE: UNUSABLE
    NANU NUMBER: YYYYSSS
    NANU DTG: DDHHMMZ MMM YYYY
    REFERENCE NANU: YYYYNNN
    REF NANU DTG: DDHHMMZ MMM YYYY
    SVN: XXX
    PRN: XX
    START JDAY: JJJ
    START TIME ZULU: HHMM
    START CALENDAR DATE: DD MMM YYYY
    STOP JDAY: JJJ
    STOP TIME ZULU: HHMM
    STOP CALENDAR DATE: DD MMM YYYY

2.  CONDITION: GPS SATELLITE SVNXXX (PRNXX) WAS UNUSABLE ON JDAY JJJ
    (DD MMM YYYY) BEGINNING HHMM ZULU UNTIL JDAY JJJ (DD MMM YYYY)
    ENDING HHMM ZULU.

3.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-9 UNUSABLE NANU Message Template

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYSSS
SUBJ: SVNXXX (PRNXX) UNUSABLE JDAY JJJ/HHMM - JDAY JJJ/HHMM
1.   NANU TYPE: UNUNOREF
     NANU NUMBER: YYYYSSS
     NANU DTG: DDHHMMZ MMM YYYY
     REFERENCE NANU: N/A
     REF NANU DTG: N/A
     SVN: XXX
     PRN: XX
     START JDAY: JJJ
     START TIME ZULU: HHMM
     START CALENDAR DATE: DD MMM YYYY
     STOP JDAY: JJJ
     STOP TIME ZULU: HHMM
     STOP CALENDAR DATE: DD MMM YYYY

2.   CONDITION: GPS SATELLITE SVNXXX (PRNXX) WAS UNUSABLE ON JDAY JJJ
     (DD MMM YYYY) BEGINNING HHMM ZULU UNTIL JDAY JJJ (DD MMM YYYY)
     ENDING HHMM ZULU.

3.   POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
     CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
     https://www.faa.gov/air\_traffic/nas/gps\_reports/,
     MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
     GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
     MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
     JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-10 UNUNOREF NANU Message Template

10.1.3 General NANU Messages

General NANU messages describe a GPS issue, problem, or event deemed noteworthy to the GPS user community. General NANU topics may include but are not limited to failures in meeting SPS Performance Standard requirements, space segment problems that cannot be conveyed through other NANU formats, and space vehicle (SV) disposal announcements. NANU messages of this type are all identified with the “GENERAL” NANU acronym.

General NANU messages may be generically worded and may direct further detailed questions to the appropriate authorities. Recommendations or notes may be included, depending on the circumstances.

The GENERAL message structure is a text paragraph format, such as, the generic example shown in Figure 10-11. The format consists of two sections. Section one contains a header indicating the type of message. Section two is the body of the message.

```

1.      NANU TYPE: GENERAL
*** GENERAL MESSAGE TO ALL GPS USERS ***

MESSAGE WRITTEN IN PARAGRAPH FORM

*** GENERAL MESSAGE TO ALL GPS USERS ***

```

Figure 10-11 General Message Format

10.1.4 Other Messages

NANU types in the “other” group describe events that occur infrequently. Table 10-III identifies NANU types in the “other” outage group. The table describes the NANU acronym used in the message format, the name of the file and a description of the message.

Table 10-III Other Types of NANU Messages

NANU ACRONYM	NAME	DESCRIPTION
USABINIT	Initially usable	Notifies Users that an SV is set healthy for the first time.
LEAPSEC	Leap second	Notifies Users of an impending leap second.
LAUNCH	Launch	Notifies Users after the launch of a satellite.
DECOM	Decommission	Notifies Users that an SV has been removed from the current constellation identified within the broadcast Almanac, but does not necessarily signify permanent disposal.

The message templates for the NANU types listed in Table 10-III are shown in Figures 10-12 through 10-15, respectively.

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYSSS
SUBJ: SVNXXX (PRNXX) USABLE JDAY JJJ/HHMM
1.  NANU TYPE: USABINIT
    NANU NUMBER: YYYYYSSS
    NANU DTG: DDHMMZ MMM YYYY
    REFERENCE NANU: N/A
    REF NANU DTG: N/A
    SVN: XXX
    PRN: XX
    START JDAY: JJJ
    START TIME ZULU: HHMM
    START CALENDAR DATE: DD MMM YYYY
    STOP JDAY: N/A
    STOP TIME ZULU: N/A
    STOP CALENDAR DATE: N/A
2.  CONDITION: GPS SATELLITE SVNXXX (PRNXX) WAS USABLE AS OF JDAY JJJ
    (DD MMM YYYY) BEGINNING HHMM ZULU.
3.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-12 USABINIT NANU Message Template

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYSSS
SUBJ: LEAP SECOND
1.  CONDITION: THE INTERNATIONAL EARTH ROTATION SERVICE (IERS) HAS ANNOUNCED THE
    INTRODUCTION OF A LEAP SECOND TO OCCUR AT THE END OF MMM YYYY
2.  COORDINATED UNIVERSAL TIME (UTC) WILL SEQUENCE AS FOLLOWS:
    DD MMM YYYY  HH HOURS MM MINUTES SS SECONDS
    DD MMM YYYY  HH HOURS MM MINUTES SS SECONDS
    DD MMM YYYY  HH HOURS MM MINUTES SS SECONDS
3.  FOR GPS, AS WITH PREVIOUS LEAP SECOND UPDATES, THE UTC DATA IN SUBFRAME 4, PAGE 18 OF
    THE NAVIGATION MESSAGE WILL CHANGE IN ACCORDANCE WITH IS-GPS-200.
    FOR GPS, IF/AS AVAILABLE, THE UTC DATA IN MESSAGE TYPE 33 OF THE CNAV DATA FOR L2C
    WILL CHANGE IN ACCORDANCE WITH IS-GPS-200.
    FOR GPS, IF/AS AVAILABLE, THE UTC DATA IN SUBFRAME 3, PAGE 1 OF THE CNAV-2 DATA FOR
    L1C WILL CHANGE IN ACCORDANCE WITH IS-GPS-800.
    FOR GPS, IF/AS AVAILABLE, THE UTC DATA IN MESSAGE TYPE 33 OF THE CNAV DATA FOR L5
    WILL CHANGE IN ACCORDANCE WITH IS-GPS-705.
    BEFORE THE LEAP SECOND
    GPS-UTC IS XX (GPS IS AHEAD OF UTC BY XX SECONDS)
    AFTER THE LEAP SECOND
    GPS-UTC WILL BE XX (GPS WILL BE AHEAD OF UTC BY XX SECONDS)
4.  POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
    CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air\_traffic/nas/gps\_reports/,
    MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
    MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-13 LEAPSEC NANU Message Template

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYSSS
SUBJ: SVNXXX (PRNXX) LAUNCH JDAY JJJ
1.   NANU TYPE: LAUNCH
     NANU NUMBER: YYYYYSSS
     NANU DTG: DDHHMMZ MMM YYYY
     SVN: XXX
     PRN: XX
     LAUNCH JDAY: JJJ
     LAUNCH TIME ZULU: HHMM

2.   GPS SATELLITE SVN XXX (PRN XX) WAS LAUNCHED ON JDAY JJJ A USABINIT NANU WILL BE SENT
     WHEN THE SATELLITE IS SET ACTIVE TO SERVICE.

3.   POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
     CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
     https://www.faa.gov/air\_traffic/nas/gps\_reports/,
     MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
     GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
     MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
     JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-14 LAUNCH NANU Message Template

```
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYSSS
SUBJ: SVNXXX (PRNXX) DECOMMISSIONING JDAY JJJ/HHMM
1.   NANU TYPE: DECOM
     NANU NUMBER: YYYYYSSS
     NANU DTG: DDHHMMZ MMM YYYY
     REFERENCE NANU: YYYYYSSS
     REF NANU DTG: DDHHMMZ MMM YYYY
     SVN: XXX
     PRN: XX
     UNUSABLE START JDAY: JJJ
     UNUSABLE START TIME ZULU: HHMM
     UNUSABLE START CALENDAR DATE: DD MMM YYYY
     DECOMMISSIONING START JDAY: JJJ
     DECOMMISSIONING START TIME ZULU: HHMM
     DECOMMISSIONING START CALENDAR DATE: DD MMM YYYY

2.   CONDITION: GPS SATELLITE SVNXXX (PRNXX) WAS UNUSABLE AS OF JDAY JJJ (DD MMM YYYY) AND
     REMOVED FROM THE GPS CONSTELLATION ON JDAY JJJ (DD MMM YYYY) AT HHMM ZULU.

3.   POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
     CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
     https://www.faa.gov/air\_traffic/nas/gps\_reports/,
     MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
     GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
     MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
     JSPOCCOMBATOPS@VANDENBERG.AF.MIL
```

Figure 10-15 DECOM NANU Message Template

10.2 NANU Notification Times

NANU messages announcing scheduled events are normally distributed to the user community prior to the event. NANU messages announcing unscheduled events are normally distributed to the user community as soon as practical after the event. However, mission critical problems have priority over user notification and therefore may delay normal NANU distribution. NANU notification times typically vary by NANU group. Nominal and threshold NANU notification times for the four NANU groups are summarized in Table 10-IV.

Table 10-IV NANU Notification Times

NANU Group	Nominal Notification Times	Threshold
Scheduled	96 hours prior to outage start	NLT 48 hours prior to outage start (see note #1)
Unscheduled	15 minutes after outage start	Less than 1 hour after outage start
General	None – Timing determined on a case-by-case basis	
Other	None – Timing determined on a case-by-case basis	
NOTE 1: If the need for a planned outage is determined less than 48 hours prior to the start time of the outage, the associated Forecast NANU will not meet the Scheduled outage Threshold.		

The length of the outage time specified in scheduled NANU messages is typically longer than the expected maintenance time to allow for minor variations in the time required to accomplish a particular maintenance activity.

10.3 NANU Message Format

The NANU message structure for all messages, except the General, LAUNCH, DECOM, and LEAPSEC messages, is based on a tabular format that simplifies the readability of data. A template for these messages is illustrated in Figure 10-16. These messages are arranged into a header and three sections. The following paragraphs explain this message format in more detail.


```

NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYN
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE JDAY JJJ/HHMM - JDAY JJJ/HHMM
1. NANU TYPE: FCSTDV
   NANU NUMBER: YYYYN
   NANU DTG: DDHHMMZ MMM YYYY
   REFERENCE NANU: YYYYN
   REF NANU DTG: DDHHMMZ MMM YYYY
   SVN: XXX
   PRN: XX
   START JDAY: JJJ
   START TIME ZULU: HHMM
   START CALENDAR DATE: DD MMM YYYY
   STOP JDAY: JJJ
   STOP TIME ZULU: HHMM
   STOP CALENDAR DATE: DD MMM YYYY

2. CONDITION: GPS SATELLITE SVNXXX (PRNXX) WILL BE UNUSABLE ON JDAY JJJ
   (DD MMM YYYY) BEGINNING HHMM ZULU UNTIL JDAY JJJ (DD MMM YYYY) ENDING HHMM ZULU.

3. POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, HTTPS://WWW.NAVCEN.USCG.GOV,
   CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
   https://www.faa.gov/air\_traffic/nas/gps\_reports/,
   MILITARY - GPS Operations Center at HTTPS://GPS.AFSPC.AF.MIL/GPSOC, DSN 560-2541, COMM 719-567-2493,
   GPS\_SUPPORT@SCHRIEVER.AF.MIL, HTTP://WWW.SCHRIEVER.AF.MIL/GPS,
   MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
   JSPOCCOMBATOPS@VANDENBERG.AF.MIL

```

Figure 10-16 NANU Message Template

10.3.1 NANU Header

The first line of the header includes the title “NOTICE ADVISORY TO NAVSTAR USERS (NANU)” and the assigned identification (ID) number for that NANU message. The ID number consists of the four-digit year followed by a sequentially assigned three-digit number which begins at 001 for the first NANU on the first day of a new year. The ID number is incremented for each new NANU up to a maximum of 999 in any given calendar year, after which the ID number rolls over and begins numbering subsequent NANUs beginning with 001. The second line identifies the subject of the message including the Space Vehicle Number (SVN), SV Pseudo Random Noise (PRN) number, type of message, and effective dates for the event. The three digit SVN field and two digit PRN number are zero padded. The date is in Julian day-of-year format (JDAY), numbered from 001 to 366, and the time is Zulu referenced in a 24-hour, two digit hour (HH) and two digit minute (MM) format. The NANU header is illustrated in Figure 10-17.

```

YYYYNN-----
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYN
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE JDAY JJJ/HHMM - JDAY JJJ/HHMM
1. NANU TYPE: FCSTDV
   NANU NUMBER: YYYYN
   NANU DTG: DDHHMMZ MMM YYYY
   REFERENCE NANU: YYYYN
   REF NANU DTG: DDHHMMZ MMM YYYY
   SVN: XXX

```

Figure 10-17 NANU Header

10.3.2 NANU Section 1

Section 1 provides the message description, reference information, satellite identification and outage time in a tabular format.

10.3.2.1 NANU Message Description

The message description includes the NANU type acronym, NANU number, and Day Time Group (DTG). The NANU type acronym is as previously described in paragraphs 10.1.1, 10.1.2, and 10.1.4. The NANU number is as previously described in paragraph 10.3.1. The DTG provides the date the NANU was created. The DTG format is represented as DDHHMM “Z” MMM YYYY. The first two digits identify the calendar day (DD) followed by the hour (HH) and minutes (MM). The letter Z indicates that the time is given in Zulu reference. This is followed by the first three letters of the month (MMM) and the four-digit year (YYYY). This portion of the message is illustrated in Figure 10-18.

```
YYYYNNN-----  
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYNN  
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE JDAY JJJ/HHMM - JDAY JJJ/HHMM  
1. NANU TYPE: FCSTDV  
   NANU NUMBER: YYYYYNN  
   NANU DTG: DDHHMMZ MMM YYYY  
   REFERENCE NANU: YYYYYNN  
   REF NANU DTG: DDHHMMZ MMM YYYY  
   SVN: XXX
```

Figure 10-18 Message Description

10.3.2.2 NANU Reference Information

As shown in Figure 10-19, the reference information serves to close, extend, cancel, or reschedule previously broadcast messages. The data conveyed in this section includes the message ID number (YYYYNNN) and DTG (REF NANU DTG) of a previously broadcast message. Both of these items will be noted as N/A if the current message is not a follow up message.

```
YYYYNNN-----  
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYNN  
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE JDAY JJJ/HHMM - JDAY JJJ/HHMM  
1. NANU TYPE: FCSTDV  
   NANU NUMBER: YYYYYNN  
   NANU DTG: DDHHMMZ MMM YYYY  
   REFERENCE NANU: YYYYYNN  
   REF NANU DTG: DDHHMMZ MMM YYYY  
   SVN: XXX  
   PRN: XX
```

Figure 10-19 Reference Information

10.3.2.3 Satellite Identification

As shown in Figure 10-20, the satellite identification information specifies the satellite that is the subject of the NANU. The identification information includes the satellite three-digit SVN and two-digit PRN number. The SVN field and PRN number are zero padded.

```
YYYYNNN-----  
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYNN  
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE JDAY JJJ/HHMM - JDAY JJJ/HHMM  
1. NANU TYPE: FCSTDV  
   NANU NUMBER: YYYYYNN  
   NANU DTG: DDHHMMZ MMM YYYY  
   REFERENCE NANU: YYYYYNN  
   REF NANU DTG: DDHHMMZ MMM YYYY  
   SVN: XXX  
   PRN: XX  
   START JDAY: JJJ  
   START TIME ZULU: HHMM  
   START CALENDAR DATE: DD MMM YYYY  
   STOP JDAY: JJJ
```

Figure 10-20 Satellite Identification Information

10.3.2.4 Outage Time

As shown in Figure 10-21, the outage time variables include start and stop dates and times. The start day is provided in three-digit Julian Day-of-Year format (JJJ = 001 to 366) as well as calendar day-month-year format. The calendar day is represented as two digits (DD), followed by the first three letters of the month (MMM) followed by the four-digit year (YYYY). The start time is given in Zulu time in a 24-hour, two-digit hour (HH), and two-digit minute (MM) format. The stop dates and time follow the same formats as the start dates and time.

```
YYYYNNN-----  
NOTICE ADVISORY TO NAVSTAR USERS (NANU) YYYYYNN  
SUBJ: SVNXXX (PRNXX) FORECAST OUTAGE JDAY JJJ/HHMM - JDAY JJJ/HHMM  
1. NANU TYPE: FCSTDV  
   NANU NUMBER: YYYYYNN  
   NANU DTG: DDHHMMZ MMM YYYY  
   REFERENCE NANU: YYYYYNN  
   REF NANU DTG: DDHHMMZ MMM YYYY  
   SVN: XXX  
   PRN: XX  
   START JDAY: JJJ  
   START TIME ZULU: HHMM  
   START CALENDAR DATE: DD MMM YYYY  
   STOP JDAY: JJJ  
   STOP TIME ZULU: HHMM  
   STOP CALENDAR DATE: DD MMM YYYY
```

Figure 10-21 Outage Time

10.3.3 NANU Section 2

As shown in Figure 10-22, Section 2 is a summary of the NANU in paragraph format including the satellite three-digit SVN and two-digit PRN number, text description of the event, start and stop date(s) in Julian and calendar date formats, and start and stop time(s) in Zulu hours and minutes. The SVN field and PRN number are zero padded.

2. CONDITION: GPS SATELLITE SVNXXX (PRNXX) WILL BE UNUSABLE ON JDAY JJJ
(DD MMM YYYY) BEGINNING HHMM ZULU UNTIL JDAY JJJ (DD MMM YYYY) ENDING HHMM ZULU.

Figure 10-22 NANU Section 2

10.3.4 NANU Section 3

Section 3 of the NANU identifies points of contact for additional technical and support information. An example of this section is illustrated in Figure 10-23.

3. POC: CIVIL NON-AVIATION - NAVCEN at 703-313-5900, [HTTPS://WWW.NAVCEN.USCG.GOV](https://www.navcen.uscg.gov),
CIVIL AVIATION - FAA Satellite Operations Group at 540-422-4178,
https://www.faa.gov/air_traffic/nas/gps_reports/,
MILITARY - GPS Operations Center at [HTTPS://GPS.AFSPC.AF.MIL/GPSOC](https://gps.afspc.af.mil/gpsoc), DSN 560-2541, COMM 719-567-2493,
GPS_SUPPORT@SCHRIEVER.AF.MIL, [HTTP://WWW.SCHRIEVER.AF.MIL/GPS](http://www.schriever.af.mil/gps),
MILITARY ALTERNATE - JOINT SPACE OPERATIONS CENTER, DSN 276-9994, COMM 805-606-9994,
JSPOCCOMBATOPS@VANDENBERG.AF.MIL

Figure 10-23 Contact Information

20 APPENDIX 2: OPERATIONAL ADVISORY DATA FILE

Appendix 2 describes the Operational Advisory message format.

20.1 Operational Advisory

The Operational Advisory (OA) message provides a summary of the satellite constellation status. An example is shown in Figure 20-1. The OA is arranged in three sections. The following paragraphs describe each section and subsection of the OA.

```

UNCLASSIFIED
GPS OPERATIONAL ADVISORY          086.OA1
SUBJ: GPS STATUS                   27 MAR 2009

1. SATELLITES, PLANES, AND CLOCKS (CS=CESIUM RB=RUBIDIUM):
A. BLOCK I   : NONE
B. BLOCK II  : PRNS 01, 02, 03, 04, 05, 06, 07, 08, 09, 10, 11, 12, 13, 14
  PLANE      : SLOT B2, D1, C2, D4, B6, C5, A6, A3, A1, E3, D2, B4, F3, F1
  CLOCK      : RB, RB, CS, RB, RB, RB, RB, CS, CS, CS, RB, RB, RB, RB
  BLOCK II   : PRNS 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28
  PLANE      : SLOT F2, B1, C4, E4, C3, E1, D3, E2, F4, D5, A5, F5, A4, B3
  CLOCK      : RB, RB, RB, RB, RB, RB, RB, RB, RB, CS, RB, RB, CS, RB
  BLOCK II   : PRNS 29, 30, 31, 32
  PLANE      : SLOT C1, B5, A2, E5
  CLOCK      : RB, CS, RB, RB
C*. BLOCK III: PRNS 33, 34, 35
  PLANE      : SLOT A2, C3, F4
  CLOCK      : RB, RB, RB

2. CURRENT ADVISORIES AND FORECASTS:
A. FORECASTS: FOR SEVEN DAYS AFTER EVENT CONCLUDES.
  NANU      MSG DATE/TIME      PRN  TYPE      SUMMARY (JDAY/ZULU TIME START - STOP)
2009022    261836Z MAR 2009      18  FCSTDV     092/1600-093/0630
B. ADVISORIES:
  NANU      MSG DATE/TIME      PRN  TYPE      SUMMARY (JDAY/ZULU TIME START - STOP)
C. GENERAL:
  NANU      MSG DATE/TIME      PRN  TYPE      SUMMARY (JDAY/ZULU TIME START - STOP)
2009020    202158Z MAR 2009              GENERAL     /-/
2009021    241836Z MAR 2009      01  LAUNCH     /-/
2009023    262212Z MAR 2009              GENERAL     /-/

3. REMARKS:
A. THE POINT OF CONTACT FOR GPS MILITARY OPERATIONAL SUPPORT IS THE GPS OPERATIONS CENTER
  AT 719-567-2541 OR DSN 560-2541.
B. CIVIL NON-AVIATION: US COAST GUARD NAVCEN AT 703-313-5900 24 HOURS DAILY AND INTERNET
  HTTPS://WWW.NAVCEN.USCG.GOV.
C. CIVIL AVIATION: FAA SATELLITE OPERATIONS GROUP AT 540-422-4178,
  HTTPS://WWW.FAA.GOV/AIR_TRAFFIC/NAS/GPS_REPORTS/.
D. MILITARY SUPPORT WEBPAGES CAN BE FOUND AT THE FOLLOWING HTTPS://GPS.AFSPC.AF.MIL/GPS OR
  HTTPS://GPS.AFSPC.AF.MIL/GPSOC.

```

*Note: Section 1.C of the example OA message shown above contains example data for the GPS III SVs to show the type of data that will go in this section in the OCX era. This example is not meant to represent the actual GPS constellation configuration.

Figure 20-1 Sample Operational Advisory

20.2 OA Header.

The header includes the title “GPS OPERATIONAL ADVISORY,” the subject “SUBJ: GPS STATUS” and the date. The date is represented in a format that includes two-digit day (DD), the first three characters of the month (MMM), and four-digit year (YYYY). The OA header is illustrated in Figure 20-2.

UNCLASSIFIED
GPS OPERATIONAL ADVISORY 086.OA1
SUBJ: GPS STATUS 27 MAR 2009

Figure 20-2 OA Header

20.3 OA Section 1

Section 1 lists operational satellites by PRN number, assigned plane, and clock in current use. The PRN number is a two digit number that is zero padded. Subsection 1.A previously identified operational satellites in Block I. However, these satellites are no longer operational, so this subsection includes the word “NONE”. Subsection 1.B identifies satellites within Block II that are currently in use. Subsection 1.C identifies satellites within Block III that are currently in use. The example data shown for Section 1 is not meant to represent the actual GPS constellation configuration. The abbreviations CS and RB are used to indicate Cesium and Rubidium clocks, respectively. An example of section 1 of the OA is illustrated in Figure 20-3.

```

I. SATELLITES, PLANES, AND CLOCKS (CS=CESIUM RB=RUBIDIUM):
A. BLOCK I : NONE
B. BLOCK II : PRNS 01, 02, 03, 04, 05, 06, 07, 08, 09, 10, 11, 12, 13, 14
  PLANE : SLOT B2, D1, C2, D4, B6, C5, A6, A3, A1, E3, D2, B4, F3, F1
  CLOCK : RB, RB, CS, RB, RB, RB, RB, CS, CS, CS, RB, RB, RB, RB
  BLOCK II : PRNS 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28
  PLANE : SLOT F2, B1, C4, E4, C3, E1, D3, E2, F4, D5, A5, F5, A4, B3
  CLOCK : RB, RB, RB, RB, RB, RB, RB, RB, RB, CS, RB, RB, CS, RB
  BLOCK II : PRNS 29, 30, 31, 32
  PLANE : SLOT C1, B5, A2, E5
  CLOCK : RB, CS, RB, RB
C. BLOCK III: PRNS 33, 34, 35
  PLANE : SLOT A2, C3, F4
  CLOCK : RB, RB, RB
  
```

Figure 20-3 OA Section 1

20.4 OA Section 2

Section 2 contains a summary of current and recent advisories, forecasts, and general text messages. It is organized into three subsections. Subsection 2A summarizes scheduled NANU messages. Subsection 2B summarizes advisory messages (messages with prefix UNU). Section 2C summarizes general text messages. The PRN number is zero-padded. An example of section 2 of the OA is illustrated in Figure 20-4.

2. CURRENT ADVISORIES AND FORECASTS:				
A. FORECASTS: FOR SEVEN DAYS AFTER EVENT CONCLUDES.				
NANU	MSG DATE/TIME	PRN	TYPE	SUMMARY (JDAY/ZULU TIME START - STOP)
2009022	261836Z MAR 2009	18	FCSTDV	092/1600-093/0630
B. ADVISORIES:				
NANU	MSG DATE/TIME	PRN	TYPE	SUMMARY (JDAY/ZULU TIME START - STOP)
C. GENERAL:				
NANU	MSG DATE/TIME	PRN	TYPE	SUMMARY (JDAY/ZULU TIME START - STOP)
2009020	202158Z MAR 2009		GENERAL	/-/
2009021	241836Z MAR 2009	01	LAUNCH	/-/
2009023	262212Z MAR 2009		GENERAL	/-/

Figure 20-4 OA Section 2

20.5 OA Section 3

Section 3 identifies points of contact for additional technical and support information. It is organized into three subsections, each in text format. An example of section 3 of the OA is illustrated in Figure 20-5.

3. REMARKS:
A. THE POINT OF CONTACT FOR GPS MILITARY OPERATIONAL SUPPORT IS THE GPS OPERATIONS CENTER AT 719-567-2541 OR DSN 560-2541.
B. CIVIL NON-AVIATION: US COAST GUARD NAVCEN AT 703-313-5900 24 HOURS DAILY AND INTERNET HTTPS://WWW.NAVCEN.USCG.GOV .
C. CIVIL AVIATION: FAA SATELLITE OPERATIONS GROUP AT 540-422-4178, HTTPS://WWW.FAA.GOV/AIR_TRAFFIC/NAS/GPS_REPORTS/ .
D. MILITARY SUPPORT WEBPAGES CAN BE FOUND AT THE FOLLOWING HTTPS://GPS.AFSPC.AF.MIL/GPS OR HTTPS://GPS.AFSPC.AF.MIL/GPSOC .

Figure 20-5 OA Section 3

30 APPENDIX 3: SATELLITE OUTAGE FILE (SOF) FORMAT

Following is a list of the rules or protocols for the SOF data.

Usage Rules

1. The SOF always contains fields identifying creation date/time and reference date/time.
2. A new SOF is built each time a NANU is issued.
3. The latency of the SOF initially may be 15-20 minutes, and is driven by operational procedures and workload.

File Naming Convention

The most recently built SOF is given a standard name that contains the creation date/time and the file format version number, 'yyyy_ddd_hhmmss_vnn.sof', where yyyy is the year, ddd is the Jday (day of year starting with 1), hhmmss is the hour/minute/second UTC, and nn is the file format version number. The file format version number will increment sequentially whenever the file format changes.

Dissemination Methods

Unclassified Web Site. The GPSOC maintains a Web site accessible to unclassified users worldwide. The current SOF is posted at a conspicuous spot on this Web site for download.

Classification

The SOF is Unclassified and approved for public release. [Reference GPS Security Classification Guide, 30 Sep 2008, Topic Number 700.7.10]

Format

The SOF is formatted in XML according to the format below. The data type definition (DTD), the data format, and the data field definitions are provided.

A sample SOF with an internal DTD is as follows:

SOF DTD

```
<?xml version="1.0"?>
```

```
<!DOCTYPE GPSISFILE [
```

```
    <!ELEMENT GPSISFILE (CREATION,REFERENCE,(PREDICTED|CURRENT|HISTORICAL)+)>
```

```
    <!ELEMENT CREATION EMPTY>
```

```
    <!ELEMENT REFERENCE EMPTY>
```

```
    <!ELEMENT PREDICTED EMPTY>
```


<!ELEMENT CURRENT EMPTY>
<!ELEMENT HISTORICAL EMPTY>
<!ATTLIST GPSISFILE FILEID CDATA #FIXED "SOF">
<!ATTLIST GPSISFILE SYSID CDATA #FIXED "GPS">
<!ATTLIST GPSISFILE VERSION CDATA #REQUIRED>
<!ATTLIST CREATION YEAR CDATA #REQUIRED>
<!ATTLIST CREATION DOY CDATA #REQUIRED>
<!ATTLIST CREATION HR CDATA #REQUIRED>
<!ATTLIST CREATION MIN CDATA #REQUIRED>
<!ATTLIST CREATION SEC CDATA #REQUIRED>
<!ATTLIST REFERENCE YEAR CDATA #REQUIRED>
<!ATTLIST REFERENCE DOY CDATA #REQUIRED>
<!ATTLIST REFERENCE HR CDATA #REQUIRED>
<!ATTLIST REFERENCE MIN CDATA #REQUIRED>
<!ATTLIST REFERENCE SEC CDATA #REQUIRED>
<!ATTLIST PREDICTED SVID CDATA #REQUIRED>
<!ATTLIST PREDICTED SVN CDATA #REQUIRED>
<!ATTLIST PREDICTED NAME (NANU|GOCGIS|USER_DEFINED) #REQUIRED>
<!ATTLIST PREDICTED TYPE (FCSTDV|FCSTMX) #REQUIRED>
<!ATTLIST PREDICTED REFERENCE CDATA #REQUIRED>
<!ATTLIST PREDICTED START_YEAR CDATA #REQUIRED>
<!ATTLIST PREDICTED START_DOY CDATA #REQUIRED>
<!ATTLIST PREDICTED START_HR CDATA #REQUIRED>
<!ATTLIST PREDICTED START_MIN CDATA #REQUIRED>
<!ATTLIST PREDICTED START_SEC CDATA #REQUIRED>

<!ATTLIST PREDICTED END_YEAR CDATA #REQUIRED>
<!ATTLIST PREDICTED END_DOY CDATA #REQUIRED>
<!ATTLIST PREDICTED END_HR CDATA #REQUIRED>
<!ATTLIST PREDICTED END_MIN CDATA #REQUIRED>
<!ATTLIST PREDICTED END_SEC CDATA #REQUIRED>
<!ATTLIST CURRENT SVID CDATA #REQUIRED>
<!ATTLIST CURRENT SVN CDATA #REQUIRED>
<!ATTLIST CURRENT NAME (NANU|GOCGIS|USER_DEFINED) #REQUIRED>
<!ATTLIST CURRENT TYPE CDATA #FIXED "UNUSUFN">
<!ATTLIST CURRENT REFERENCE CDATA #REQUIRED>
<!ATTLIST CURRENT START_YEAR CDATA #REQUIRED>
<!ATTLIST CURRENT START_DOY CDATA #REQUIRED>
<!ATTLIST CURRENT START_HR CDATA #REQUIRED>
<!ATTLIST CURRENT START_MIN CDATA #REQUIRED>
<!ATTLIST CURRENT START_SEC CDATA #REQUIRED>
<!ATTLIST HISTORICAL SVID CDATA #REQUIRED>
<!ATTLIST HISTORICAL SVN CDATA #REQUIRED>
<!ATTLIST HISTORICAL NAME (NANU|GOCGIS|USER_DEFINED) #REQUIRED>
<!ATTLIST HISTORICAL TYPE (FCSTSUMM|UNUSABLE|UNUNOREF) #REQUIRED>
<!ATTLIST HISTORICAL REFERENCE CDATA #REQUIRED>
<!ATTLIST HISTORICAL START_YEAR CDATA #REQUIRED>
<!ATTLIST HISTORICAL START_DOY CDATA #REQUIRED>
<!ATTLIST HISTORICAL START_HR CDATA #REQUIRED>
<!ATTLIST HISTORICAL START_MIN CDATA #REQUIRED>
<!ATTLIST HISTORICAL START_SEC CDATA #REQUIRED>

```
<!ATTLIST HISTORICAL END_YEAR CDATA #REQUIRED>  
<!ATTLIST HISTORICAL END_DOY CDATA #REQUIRED>  
<!ATTLIST HISTORICAL END_HR CDATA #REQUIRED>  
<!ATTLIST HISTORICAL END_MIN CDATA #REQUIRED>  
<!ATTLIST HISTORICAL END_SEC CDATA #REQUIRED>
```

]>

SOF Structure

```
<?xml version="1.0"?>
```

```
<GPSISFILE FILEID="SOF" SYSID="GPS" VERSION="2">
```

```
  <CREATION YEAR="2004" DOY="257" HR="11" MIN="2" SEC="11" />
```

```
  <REFERENCE YEAR="2004" DOY="257" HR="11" MIN="2" SEC="11" />
```

```
  <PREDICTED
```

```
    SVID="9" SVN="39"
```

```
    NAME="NANU" TYPE="FCSTMX" REFERENCE="2004094"
```

```
    START_YEAR="2004"    START_DOY="229"    START_HR="12"    START_MIN="0"  
    START_SEC="0"
```

```
    END_YEAR="2004" END_DOY="230" END_HR="0" END_MIN="0" END_SEC="0"
```

```
  />
```

```
  <CURRENT
```

```
    SVID="31" SVN="31"
```

```
    NAME="NANU" TYPE="UNUSUFN" REFERENCE="2004101"
```

```
    START_YEAR="2004"    START_DOY="257"    START_HR="5"    START_MIN="50"  
    START_SEC="0"
```

```
  />
```

```
  <HISTORICAL
```

```
    SVID="27" SVN="27"
```

NAME="NANU" TYPE="UNUSABLE" REFERENCE="2004100"

START_YEAR="2004" START_DOY="242" START_HR="1" START_MIN="32"
START_SEC="0"

END_YEAR="2004" END_DOY="243" END_HR="19" END_MIN="12" END_SEC="0"

/>

</GPSISFILE>

All times are UTC TIME (ZULU) unless otherwise specified. DOY is day of year (same as JDAY); 1=1 January, 366 is valid for leap year

'GPSISFILE' FILE INFORMATION

Occurs once per file

FILEID is always 'SOF'

SYSID is always 'GPS'

VERSION is the version number of the file. The version text should be an integer version number. Example: 2

CREATION indicates date/time of file creation. Time is computer time (UTC time zone).

REFERENCE indicates date/time to which SOF data applies. For example, if January 10, 2003 1550Z is the REFERENCE time then Satellite Outage information will be collected up to and including that time, including past, current, and predicted information. The REFERENCE time is set to be the date/time of the most recent NANU incorporated into the SOF.

'SOF_RECORD' INFORMATION

Occurs multiple times per file, once for each predicted, current or historical satellite outage issued by the REFERENCE data/time.

There are three types of SOF records.

PREDICTED identifies predicted outages as of the REFERENCE time.

CURRENT identifies any active outages as of the REFERENCE time, along with the time the outage began.

HISTORICAL identifies actual outages that have taken place prior to the REFERENCE time.

SVID - reusable identifier for each satellite in identified system. For GPS the SVID shall be the PRN.

SVN (Satellite Vehicle Number) – unique sequential number associated with satellite-specific program is an integer. For GPS this is assigned by the US Air Force.

PREDICTED record fields

NAME – Alphanumeric indicator of outage source (currently ‘NANU’). GOCGIS used when no NANU has been issued, yet outage is predicted or a GENERAL NANU has been issued that affects this outage.

TYPE – If NAME=NANU, then the choices are FCSTDV, FCSTMX. If a FCSTEXTD, then implemented as original type (FCSTDV or FCSTMX) with start date/time the same as in the FCSTEXTD and end date/time fixed twenty years out. If FCSTRESCD, then implemented as original type with dates/times as in the FCSTRESCD NANU. If a FCSTCANC type NANU is issued, the original type will be deleted from the SOF.

REFERENCE – reference info. If NAME=NANU this will be the NANU number of the last valid NANU associated with this outage. For example, if there is a FCSTDV issued with number 2003010, then REFERENCE=2003010. As another example, if there is a FCSTMX issued with number 2003047, followed by a FCSTEXTD with number 2003050, then REFERENCE=2003050.

CURRENT record fields

NAME – Alphanumeric indicator of outage source (currently ‘NANU’).

TYPE – If NAME=NANU, then the choices are UNUSUFN and GENERAL. If NANU is initially issued as a GENERAL launch message, then it will be implemented in the SOF as a UNUSUFN with the start date/time as 0000Z on the first day the satellite appears in the almanac.

REFERENCE – reference info. If NAME=NANU this will be the NANU number of the last valid NANU associated with this outage. For example, if there is a UNUSUFN issued with number 2003049, then REFERENCE=2003049.

HISTORICAL record fields

NAME –Alphanumeric indicator of outage source (currently NANU).

TYPE – If NAME=NANU, then the choices are FCSTSUMM, UNUSABLE, UNUNOREF, USABINIT, and GENERAL. If NANU is initially issued as a GENERAL launch message, then it will be implemented in the SOF as an UNUSABLE with stop dates/times as in the USABINIT and the start date/time as 0000Z on the first day the satellite appears in the almanac. This closes out the UNUSUFN that was implemented earlier for the GENERAL launch message. If the NANU is initially issued as a GENERAL decommission it will be implemented in the SOF as an UNUSABLE with the decommission date/time as the end date/time. If a GENERAL NANU is issued which cancels a previous NANU, the previous NANU will not appear in the SOF.

REFERENCE – reference info. If NAME=NANU this will be the NANU number of the last valid NANU associated with this outage. For example, if there is a FCSTSUMM issued with number 2003051, then REFERENCE=2003051.

Format Changes

Changes to file formats are implemented as follows:

1. Files implementing a new format have the VERSION attribute of the GPSISFILE element incremented. Version 1 files encoded the file version in the filename. For example, a file with a previous format may have a name like 2004_202_145503_v01.sof. Later file versions encode the version both in the filename, and the XML VERSION attribute. The filenames of the new file versions look like 2004_202_145503_v02.sof.
2. If a new file format is implemented, both the old and the new file formats will be posted to the web site location for a transition period.
3. The old file format will be posted for six months, and then be removed. This provides time for users to adapt to the new file format.
4. Notifications of file format changes, with samples of the new format, will be published to <http://www.GPS.gov> when they are final.

40 APPENDIX 4: ALMANAC DATA FILES

Appendix 4 describes the SEM and YUMA Almanac message formats.

40.1 Almanac Description

The Almanac is a subset of GPS satellite clock and ephemeris data, with reduced precision. The CS provides the GPS Almanac in two formats, YUMA and System Effectiveness Model (SEM). Each Almanac format is broken into two files. YUMA files are named `current.alm` (PRNs 1-32) and `current.blm` (PRNs 1-63). SEM files are named `current.al3` (PRNs 1-32) and `current.bl3` (PRNs 1-63). The YUMA Almanac is an easy-to-read format of the Almanac data, while the SEM format is intended as input for software tools.

40.2 SEM Almanac Parameters Definition

The SEM Almanac parameters are defined in paragraph 20.3.3.5.1.2 of IS-GPS-200. The number of bits, scale factor for the least significant bit (LSB), range, and units of the Almanac parameters are specified in Table 20-VI of IS-GPS-200.

40.3 SV Health Word

While the orbital description data is generally usable for months, the satellite health may change at any time. The SEM and YUMA Almanac data formats also include an SV health word. The SV health word is defined in paragraph 20.3.3.5.1.3 and Table 20-VIII of IS-GPS-200. Table 40-I shows the 3 MCS health categories for satellites commonly used by 2 SOPS (ACTIVE, BAD & DEAD). The "OTHER" MCS health category is a generalized term for the remaining states/conditions defined by IS-GPS-200 which may be used by 2 SOPS in the future. Table 40-I also specifies the binary health words used in SV navigation (NAV) messages and the equivalent decimal representations used by both the SEM and YUMA Almanacs. The SV health word is found in cell R-7 of each record in the SEM Almanac. It is found on the third line of each record in the YUMA Almanac. Users of the SEM and YUMA Almanacs should be prepared for any potential future 2 SOPS use of other MCS health categories, as defined by codes in IS-GPS-200, Table 20-VIII.

Table 40-I Six-Bit SV Health Word in Almanac

SV Health Category	Six Bit SV Health Word in NAV message	Numerical Representation of Six-Bit Health Word in SEM & YUMA Almanac
ACTIVE	000000	0
OTHER	000001	1
OTHER	000010	2
OTHER	000011	3
OTHER	000100	4
OTHER	000101	5
OTHER	000110	6
OTHER	000111	7
OTHER	001000	8
OTHER	001001	9
OTHER	001010	10
OTHER	001011	11
OTHER	001100	12
OTHER	001101	13
OTHER	001110	14
OTHER	001111	15
OTHER	010000	16
OTHER	010001	17
OTHER	010010	18
OTHER	010011	19
OTHER	010100	20
OTHER	010101	21
OTHER	010110	22
OTHER	010111	23
OTHER	011000	24
OTHER	011001	25
OTHER	011010	26
OTHER	011011	27
OTHER	011100	28
OTHER	011101	29
OTHER	011110	30
OTHER	011111	31
OTHER	100000	32
OTHER	100001	33
OTHER	100010	34
OTHER	100011	35
OTHER	100100	36
OTHER	100101	36
OTHER	100110	38
OTHER	100111	39
OTHER	101000	40
OTHER	101001	41

SV Health Category	Six Bit SV Health Word in NAV message	Numerical Representation of Six-Bit Health Word in SEM & YUMA Almanac
OTHER	101010	42
OTHER	101011	43
OTHER	101100	44
OTHER	101101	45
OTHER	101110	46
OTHER	101111	47
OTHER	110000	48
OTHER	110001	49
OTHER	110010	50
OTHER	110011	51
OTHER	110100	52
OTHER	110101	53
OTHER	110110	54
OTHER	110111	55
OTHER	111000	56
OTHER	111001	57
OTHER	111010	58
OTHER	111011	59
BAD	111100	60
OTHER	111101	61
OTHER	111110	62
DEAD	111111	63

40.4 SEM Almanac Format

The SEM format file example in Figure 40-1 is arranged with a header that identifies the number of records (number of satellites) and file name (current.al3). The SEM Almanac sample illustrated below is a data sample of one record out of 28 in this sample file and its parameter definition, as stated in the note of Figure 40-1, is in Table 40-II. There is an additional SEM file with a file name extension of .bl3 that is identical to .al3, except for the number of records range, PRN number range and SVN number field. All parameters are listed in Table 40-III.

```

LINE
1 28 CURRENT.ALM
2 175 589824
3
R-1 1
R-2 32
R-3 1
R-4 0.54044723510742E-0002 b 0.95157623291016E-0002 c -0.25247572921216E-0008
R-5 0.51537275390625E+0004 d -0.12954437732697E+0000 e -0.54729294776917E+0000
R-6 0.21287477016449E+0000 f 0.26512145996094E-0003 g 0.00000000000000E+0000
R-7 0
R-8 9
R-9
1
2
.
.

```

Figure 40-1 SEM Data Sample for Current.al3

Note: The **bold** letters and numbers in the rectangles are not part of the SEM format; they are used for identification purposes in Table 40-II. Table 40-II identifies the characteristics of each parameter in the SEM Almanac.

Table 40-II SEM Almanac Description for Current.al3 (Sheet 1 of 2)

Line No.	Almanac Name	Description	Units	Range	Accuracy	Precision
1	Number of records	The number of satellite Almanac records contained in the file	Records	0 to 32	1	2 significant digits
	Name of Almanac	Descriptive name for the Almanac in the file	N/A	Any combination of valid ASCII characters	N/A	24 significant characters
2	GPS Week Number	The Almanac reference week number (WNa) for all Almanac data in the file	Weeks	0 to 1023 *	1	4 significant digits
	GPS Time of Applicability	The number of seconds since the beginning of the Almanac reference week. The Almanac reference time (t_{oa}) for all Almanac data in the file	Second	0 to 602,112	1	6 significant digits
3	Blank line for format spacing					
Record Format						
R-1	PRN Number	The satellite PRN number. This is a required data item as it is the GPS user's primary means of identifying GPS satellites. It is equivalent to the space vehicle identification (SVID) number of the SV	None	1 to 32	None	2 significant digits
R-2	SVN	The SV reference number. Unique sequential number associated with each satellite	None	0 to 255 (zero denotes that this field is empty)	None	3 significant digits
R-3	Average URA Number	The satellite "average" URA** number. This is not an item in the raw Almanac file but is based on the average URA value transmitted by this satellite in subframe 1. The URA is taken in the range of 730 hours	None	0 to 15	1	2 significant digits
R-4	Eccentricity	This defines the amount of the orbit deviation from a circular orbit (e)**	Unitless	0 to 3.125 E-2	4.77 E-7	7 significant digits

Table 40-II SEM Almanac Description for Current.al3 (Sheet 2 of 2)

Line No	Almanac Name	Description	Units	Range	Accuracy	Precision
b	Inclination Offset	Satellite Almanac orbital "inclination angle offset" (δ_i)** This does not include the 0.30 semicircle reference value (i_0)**	Semi circles	-6.25 E-2 to +6.25 E-2	1.91 E-6	7 significant digits
c	Rate of Right Ascension	Rate of change in the measurement of the angle of right ascension (Ω -DOT)**	Semi circles/second	-1.1921 E-7*** to +1.1921 E-7***	3.64 E-12	7 significant digits
R-5	Square Root of Semi-Major Axis	Measurement from the center of the orbit to either the point of apogee or the point of perigee ($A^{1/2}$)**	Meters ^{1/2}	0 to 8,192	4.88 E-04	9 significant digits
d	Geographic Longitude of Orbital Plane	Geographic longitude of the orbital plane at the weekly epoch" (Ω_0)**	Semi circles	-1.0 to +1.0	1.19 E-07	9 significant digits
e	Argument of Perigee	The angle from the equator to perigee (ω)**	Semi circles	-1.0 to +1.0	1.19 E-07	9 significant digits
R-6	Mean Anomaly	The angle which describes the position of the satellite in its orbit, relative to perigee. (M_0)**	Semi circle	-1.0 to +1.0	1.19 E-07	9 significant digits
f	Zeroth Order Clock Correction	The satellite Almanac zeroth order clock correction term (a_{f0})**	Seconds	-9.7657 E-4*** to +9.7657 E-4***	9.54 E-07	5 significant digits
g	First Order Clock Correction	The satellite Almanac first order clock correction term (a_{f1})**	Seconds/second	-3.7253 E-9*** to +3.7253 E-9***	3.64 E-12	5 significant digits
R-7	Satellite Health	The satellite subframe 4 and 5, page 25 six-bit health code **	None	0 to 63	None	2 significant digits
R-8	Satellite Configuration	The satellite subframe 4, page 25 four-bit configuration code **	None	0 to 15	None	2 significant digits
R-9	Blank line for format spacing					
<p>*GPS Week Number as distributed by the CS is a modulo 1024 (0-1023) decimal number representing the modulo 1024 binary week number broadcast from an SV (see IS-GPS-200). Some user applications (such as the SEM program) may require the user to replace the modulo 1024 week number in this format with the full decimal week number (e.g., 0-65,535) in order to determine the correct calendar date of the Almanac.</p> <p>**As defined in IS-GPS-200.</p> <p>***Rounded up from max range of IS-GPS-200 binary format.</p>						

Table 40-III SEM Almanac Description for Current.bl3 (Sheet 1 of 2)

Line No.	Almanac Name	Description	Units	Range	Accuracy	Precision
1	Number of records	The number of satellite Almanac records contained in the file	Records	00 to 63	1	2 significant digits
	Blank space for format spacing					
	Name of Almanac	Descriptive name for the Almanac in the file	N/A	Any combination of valid ASCII characters	N/A	24 significant characters
2	GPS Week Number	The Almanac reference week number (WNa) for all Almanac data in the file	Weeks	0 to 1023 *	1	4 significant digits
	Blank space for format spacing					
	GPS Time of Applicability	The number of seconds since the beginning of the Almanac reference week. The Almanac reference time (t_{oa}) for all Almanac data in the file	Second	0 to 602,112	1	6 significant digits
3	Blank line for format spacing					
Record Format						
R-1	PRN Number	The satellite PRN number. This is a required data item as it is the GPS user's primary means of identifying GPS satellites. It is equivalent to the space vehicle identification (SVID) number of the SV	None	01 to 63	None	2 significant digits
R-2	SVN	The SV reference number. Unique sequential number associated with each satellite**	None	000 to 255 (000 denotes that this field is empty)	None	3 significant digits
R-3	Average URA Number	The satellite "average" URA*** number. This is not an item in the raw Almanac file but is based on the average URA value transmitted by this satellite in subframe 1. The URA is taken in the range of 730 hours	None	0 to 15	1	2 significant digits
R-4	Eccentricity	This defines the amount of the orbit deviation from a circular orbit (e)***	Unitless	0 to 3.125 E-2	4.77 E-7	7 significant digits

Table 40-III SEM Almanac Description for Current.bl3 (Sheet 2 of 2)

Line No	Almanac Name	Description	Units	Range	Accuracy	Precision
b	Inclination Offset	Satellite Almanac orbital "inclination angle offset" (δ_i)*** This does not include the 0.30 semicircle reference value (i_0)***	Semi circles	-6.25 E-2 to +6.25 E-2	1.91 E-6	7 significant digits
c	Rate of Right Ascension	Rate of change in the measurement of the angle of right ascension (Ω -DOT)***	Semi circles/second	-1.1921 E-7**** to +1.1921 E-7****	3.64 E-12	7 significant digits
R-5	Square Root of Semi-Major Axis	Measurement from the center of the orbit to either the point of apogee or the point of perigee ($A^{1/2}$)***	Meters ^{1/2}	0 to 8,192	4.88 E-04	9 significant digits
d	Geographic Longitude of Orbital Plane	Geographic longitude of the orbital plane at the weekly epoch" (Ω_0)***	Semi circles	-1.0 to +1.0	1.19 E-07	9 significant digits
e	Argument of Perigee	The angle from the equator to perigee (ω)***	Semi circles	-1.0 to +1.0	1.19 E-07	9 significant digits
R-6	Mean Anomaly	The angle which describes the position of the satellite in its orbit, relative to perigee. (M_0)***	Semi circle	-1.0 to +1.0	1.19 E-07	9 significant digits
f	Zeroth Order Clock Correction	The satellite Almanac zeroth order clock correction term (a_{f0})***	Seconds	-9.7657 E-4**** to +9.7657 E-4****	9.54 E-07	5 significant digits
g	First Order Clock Correction	The satellite Almanac first order clock correction term (a_{f1})***	Seconds/second	-3.7253 E-9**** to +3.7253 E-9****	3.64 E-12	5 significant digits
R-7	Satellite Health	The satellite subframe 4 and 5, page 25 six-bit health code ***	None	0 to 63	None	2 significant digits
R-8	Satellite Configuration	The satellite subframe 4, page 25 four-bit configuration code ***	None	0 to 15	None	2 significant digits
R-9	Blank line for format spacing					
<p>*GPS Week Number as distributed by the CS is a modulo 1024 (0-1023) decimal number representing the modulo 1024 binary week number broadcast from an SV (see IS-GPS-200). Some user applications (such as the SEM program) may require the user to replace the modulo 1024 week number in this format with the full decimal week number (e.g., 0-65,535) in order to determine the correct calendar date of the Almanac.</p> <p>** SVN Number as distributed by the CS is a modulo 256 (000-255) filled with leading zeros.</p> <p>***As defined in IS-GPS-200.</p> <p>****Rounded up from max range of IS-GPS-200 binary format.</p>						

40.5 YUMA Almanac Format

Parameters used in the YUMA format are not the same as used in the SEM format. The YUMA angular units are in radians whereas the SEM angular units are in semicircles. In addition, the YUMA Orbital Inclination is a direct measure of inclination angle (approximately 55 degrees), whereas the SEM Inclination Offset is relative to 0.30 semicircles (54 degrees). The parameters of the YUMA Almanac are identified within the message structure. Entries for ID, Health, and Week are represented in decimal format.

Figure 40-2 illustrates one record in a current.alm YUMA Almanac file sample. The maximum number of records in a current.alm file is 32 and this file addresses PRNs 1-32. Line one of each record identifies the week in which the file was generated as well as the PRN number of the subject SV. There is an additional YUMA file with a file name extension of .blm that is identical to .alm, except that it addresses PRNs 01-63 and the range of number of records or ID number in a current.blm file is 00-63.

```
***** Week 175 almanac for PRN-01 *****
ID:                                01
Health:                             000
Eccentricity:                       0.5404472351E-002
Time of Applicability(s):           589824.0000
Orbital Inclination(rad):           0.9723724451
Rate of Right Ascen(r/s):          -0.7931758961E-008
SQRT(A) (m 1/2):                    5153.727539
Right Ascen at Week(rad):           -0.4069756641E+000
Argument of Perigee(rad):           -1.719371504
Mean Anom(rad):                     0.6687658141E+000
Af0(s):                             0.2651214600E-003
Af1(s/s):                           0.0000000000E+000
Week:                               175
.
```

Figure 40-2 YUMA Almanac Data Sample For Current.alm

50 APPENDIX 5: EXTENDED SIGNALS HEALTH STATUS FILES

Appendix 5 describes the Extended Signals Health Status (ESHS) message format.

50.1 Extended Signals Health Status

The Extended Signals Health Status (ESHS) data message provides the health status of each of the modernized civil signals (L1C, L2C, and L5) for each SV, as defined in Table 50-I.

Table 50-I Modernized Civil Signals

Modernized Civil Signal	L1C	L2C	L5
Reference Document	IS-GPS-800	IS-GPS-200	IS-GPS-705
Applicable SV Block/Iteration	III	IIR-M, IIF, III	IIF, III

IS-GPS-200, Section 30.3.3.1.1.2, defines the signal health of L1, L2 and L5 as follows: “the three, one-bit, health indication in bits 52 through 54 of message type 10 refers to the L1, L2, and L5 signals of the transmitting SV. The health of each signal is indicated by:

0 = Signal OK,

1 = Signal bad or unavailable

The ESHS format, as shown in Figure 50-1, contains a header that identifies the number of records (number of satellites), filename (extension .ale), and the health of each signal as described above. The ESHS sample shown in Figure 50-1 depicts one data record out of 28 in this sample file.

LINE	Parameter Name	
1	# of Records/File Name	28 CURRENT.ALE
2	GPS Week #/GPS TOA	175 589824
3	Blank Line	
R-1	PRN	18
R-2	SVN	054
R-3	L1/L2/L5 Health Status	0-7 in binary format (000, 001, 010, 011, 100, 101, 110, 111)
R-4	Blank Line	

Note: The left columns are for information only and not part of the CURRENT.ALE file. The extended health Almanac sample (CURRENT.ALE) illustrated above is a data sample of one record out of 28 in this sample file.

After line R-4 of this example, lines R-1 through R-4 are repeated for each record in the CURRENT.ALE file.

Figure 50-I Extended Signals Health Status Data Sample

Table 50-II identifies the characteristics of each parameter in the ESHS message.

Table 50-II ESHS Description

Line No.	Parameter Name	Description	Units	Range	Accuracy	Resolution
1	Number of records	The number of satellite ESHS records contained in the file	Records	00 to 63	1	2 significant digits
	Blank space for format spacing					
	Name of ESHS file	Descriptive name for the ESHS file	N/A	Any combination of valid ASCII characters	N/A	24 significant characters
2	GPS Week Number	The Almanac reference week number (WNa) for all data in the file	Weeks	0 to 1023*	1	4 significant characters
	Blank space for format spacing					
	GPS Time of Applicability	The number of seconds since the beginning of the Almanac reference week for all data in the file.	Seconds	0 to 602,112	1	6 significant characters
3	Blank Line for Format Spacing					
Record Format						
R-1	PRN Number	The satellite PRN number. This is a required data item as it is the GPS user's primary means of identifying GPS satellites. It is equivalent to the Space Vehicle identification (SVID) number of the SV.	None	01-63	N/A	2 significant digits
R-2	SVN	The SV reference number. Unique sequential number associated with each satellite.	None	000-255 (000 denotes this field is empty)	N/A	3 significant digits
R-3	L1C/L2C/L5 Health Status	The health status of the L1C/L2C/L5 signals, defined as follows: 0 = Signal OK 1 = Signal bad or unavailable	None	0-7 in binary format (000, 001, 010, 011, 100, 101, 110, 111)	N/A	3 significant characters
R-4	Blank Line for Format Spacing					
<p>*GPS Week Number as distributed by the CS is a modulo 1024 (0-1023) decimal number representing the modulo 1024 binary week number broadcast from an SV (see IS-GPS-200). Some user applications (such as the SEM program) may require the user to replace the modulo 1024 week number in this format with the full decimal week number (e.g., 0-65,535) in order to determine the correct calendar date of the Almanac.</p>						

60 APPENDIX 6: ANTI-SPOOFING STATUS FILE

Appendix 6 describes the Anti-Spoofing Status message format.

60.1 Anti-Spoofing Status

The Anti-Spoofing (A-S) Status informs Users whether the Anti-Spoofing mode of each GPS SV is ON or OFF. There are two A-S Status files named as.txt and as2.txt. The message files are simple text files that identify each satellite in the GPS constellation by a two digit PRN number and a three digit SVN number and it shows the SV's A-S Status (ON/OFF). The difference between the two A-S Status files is the PRN Numbers. As.txt addresses PRNs 1-32 and as2.txt addresses PRNs 01-63. For the as2.txt file, the two digit PRN number and the three digit SVN field are zero padded. An example of the A-S Status (as.txt) is shown in Figure 60-1.

Anti Spoofing (A-S) Status		
PRN	SVN	A-S
1	049	ON
2	061	ON
3	033	ON
4	034	ON
5	050	ON
6	036	ON
7	048	ON
8	038	ON
9	039	ON
10	040	ON
11	046	ON
12	058	ON
13	043	ON
14	041	ON
15	055	ON
16	056	ON
17	053	ON
18	054	ON
19	059	ON
20	051	ON
21	045	ON
22	047	ON
23	060	ON
24	024	ON
25	025	ON
26	026	ON
27	027	ON
28	044	ON
29	057	ON
30	030	ON
31	052	ON
32	023	ON

Figure 60-1 Sample of the Anti-Spoofing Status file (as.txt)

70 APPENDIX 7: LETTERS OF EXCEPTION

70.1 Scope

As indicated in paragraph 1.3, initial signature approval of this document, as well as approval of subsequent changes to the document, can be contingent upon a "letter of exception". This appendix depicts such "letters of exception" when utilized by any signatory of this document in the initial approval cycle and/or in the change approval process. The ICC will omit such letters of exception from subsequent revisions of this document based on written authorization by the respective signatory (without processing a proposed interface revision notice (PIRN) for approval). When some (but not all) of the exceptions taken by a signatory are resolved, the signatory shall provide the ICC with an updated letter of exception for inclusion in the next ICD revision (without processing a PIRN for approval).

70.2 Applicable Documents

The documents listed in Section 2.1 shall be applicable to this appendix.

70.3 Letters of Exception

If signature approval of this document -- as affixed to the cover page -- is marked by an asterisk, it indicates that the approval is contingent upon the exceptions taken by that signatory in a letter of exception. Any letter of exception, which is in force for the revision of the ICD is depicted in Figure 70-1. Signatories for whom no letter of exception is shown have approved this version of the document without exception.

Figure 70-1 Letter of Exception